

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
15 May 2003 (15.05.2003)


PCT

(10) International Publication Number  
**WO 03/040023 A2**

- (51) International Patent Classification<sup>7</sup>: **B67D 1/14** (72) Inventor; and  
(21) International Application Number: **PCT/US02/35682** (75) Inventor/Applicant (for US only): **AMIDZICH, Bradford, G.** [US/US]; 34339 Venice Beach Road, Oconomowoc, WI 53060 (US).  
(22) International Filing Date: 6 November 2002 (06.11.2002) (74) Agent: **NEWHOLM, Timothy, E.**; Boyle Fredrickson Newholm Stein & Gratz S.C., 250 East Wisconsin Avenue, Suite 1030, Milwaukee, WI 53202 (US).  
(25) Filing Language: English  
(26) Publication Language: English  
(30) Priority Data: 09/993,103 6 November 2001 (06.11.2001) US  
(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.  
(71) Applicants (for all designated States except US): **PER-LICK CORPORATION** [US/US]; 8300 West Good Hope Road, Milwaukee, WI 53223 (US). **VENT-MATIC CO., INC.** [US/US]; 757 North Broadway, Suite 700, Milwaukee, WI 53202 (US).

[Continued on next page]

(54) Title: **LIQUID FLOW PRESSURE REDUCER AND METHOD**

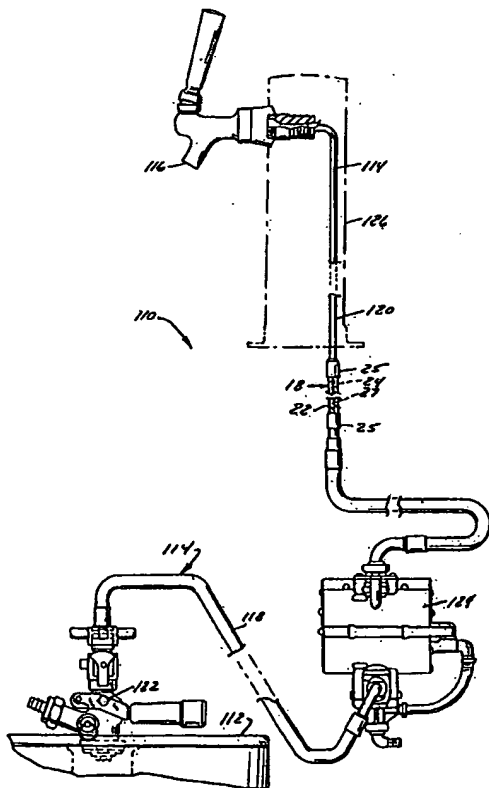

(57) Abstract: A pressure reducer (18; 318) is configured for use in a liquid delivery system that requires its liquid contents to be pressurized to a first, relatively high pressure but also requires that the liquid be delivered to a downstream location such as a faucet at a second, relatively low pressure. The pressure reducer reduces the pressure of the flowing liquid by repeatedly imparting directional changes to the liquid. Preferably, the pressure reducer comprises a stationary restrictor (27; 327, 327'), having multiple aligned segments, each of which is configured to divide the liquid into two or more diverging streams and to recombine the streams at the end of the segment. Each segment preferably comprises a curved blade (26; 326) having opposed generally toroidal surfaces that border one of two divided liquid streams.

WO 03/040023 A2



(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— *without international search report and to be republished upon receipt of that report*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**LIQUID FLOW PRESSURE REDUCER AND METHOD****BACKGROUND OF THE INVENTION**5    1.    **Field of Invention**

The present invention relates to the delivery of pressurized liquids, and, more particularly, to a method and device for reducing the pressure of a liquid flowing through a pressurized liquid system to a desired level.

10   2.    **Discussion of Related Art**

In a liquid delivery system, it is often necessary to initially increase the line pressure in the system to a relatively high level and to subsequently decrease the line pressure at a downstream location in the system. "Line pressure" can be considered the pressure in a line or other flow path connecting a pressurized source to a downstream point in the system. The  
15   need for a relatively high initial line pressure and a lower downstream line pressure is especially evident in typical beverage delivery systems, which dispense liquid from a source located some distance from, and often underneath, the liquid outlet. The liquid must be pressurized to overcome gravitational forces and head losses that resist liquid flow from the liquid source to the liquid outlet. Furthermore, when the liquid to be dispensed at the outlet  
20   is carbonated, such as with beer or soda, the liquid must also be kept under pressure to prevent a loss of carbonation. However, the initial line pressure required for the system is often too high for proper subsequent dispensation at the outlet or other ultimate use of the liquid. This overpressurization is particularly detrimental in the field of carbonated beverage delivery because the overpressurization at the system's faucet will cause the liquid to be  
25   dispensed at a higher-than desired velocity, resulting in the dispensing of an overly-foamy beverage.

Prior art beverage dispensing systems that have addressed these problems have reduced line pressure by relying on head losses within an additional tubing section. Specifically, in some beer dispensing systems, the system is shipped to an intended installation with a standard length of Mayon tubing (typically 4.5') as well as a standard additional length or "coolant loop" of copper tubing designed to provide the head losses required of a "typical" system. Then, the length of additional tubing actually required to create the correct restriction for that particular installation is determined, and the "standard" system is modified as necessary to provide the required restriction for that installation. In about 75% of systems, the "standard" restriction is inadequate, and as much as an additional 20' of Mayon tubing must be installed in the system. The existing copper tubing coolant loop leads must be lengthened by means of soldering on extensions to match the length of Mayon tubing. The Mayon tubing is then secured to the coolant leads first with filament tape and then with a polymer tape. The coolant lines and Mayon tubing bundle are then insulated from the bottom of the dispensing head to the end of the leads with six foot sections of Armaflex insulation, and the seams of the Armaflex are glued and taped together. If less than "standard" restriction is required, some Mayon tubing must be removed from the system, and the coolant leads must be shortened to match the Mayon tubing. The tubing must then be taped and insulated as described above.

It can thus be seen that the extra tubing is cumbersome to use, especially in installations in which many liquid lines must be placed in a relatively small area, as in many taverns. It is also difficult to install. These problems are especially severe in systems having beer pumps. These systems typically operate at a minimum pressure of 25 psig and often supply beer to multiple faucets through a multi-way manifold. The constant applied pressure leads to a reduction in flow. Additional restriction therefore is required to maintain the natural carbonation level of the products within the system to avoid breakout of the carbon-dioxide from the beverage and resulting foaming at the faucet.

Hence, the need has arisen to provide a pressure reducer for a fluid delivery system that is compact and simple in construction, that is easy to install, and that can be easily tailored to meet the pressure reduction needs of a particular system.

### SUMMARY OF THE INVENTION

The present invention relates to a simplified method and apparatus for obtaining a desired pressure drop in a liquid flowing through an enclosed path of a fluid delivery system. Instead of employing an extra length of coil or a complex variable or fixed orifice flow

5 restrictor, the present invention employs a special type of pressure reducer within the flow path to achieve the desired reduction in pressure. Specifically, the device is configured to impart repeated directional changes to liquid flowing through the path. The directional changes necessarily reduce the liquid's momentum, hence reducing its pressure. Preferably, the pressure reducer includes a stationary restrictor that repeatedly splits the liquid into

10 multiple (at least two) liquid streams, recombines the divided streams, then divides the recombined streams, etc. In a preferred embodiment, the restrictor includes a plurality of flow divider segments that are located within the passage and that are each configured to sequentially divide liquid flowing therepast into multiple liquid streams and to recombine the multiple liquid streams while causing the flowing liquid to change directions. Preferably, the

15 flow divider segments are arranged in a pattern such that the segments alternate between segments having a first directional curvature and segments having a second directional curvature. Each of the segments may comprise a generally helically curved blade having a leading edge, a trailing edge, and opposed curved surfaces, each of which is configured to border one of the liquid streams. The curved blades are arranged end-to-end such that the

20 trailing edge of each curved blade extends at least generally perpendicularly to the leading edge of an adjacent downstream blade.

The pressure reducer has the advantage of being much smaller than extra coils of liquid line. A desired pressure drop can be obtained with high precision simply by properly selecting the configuration and/or number of segments in the restrictor. The pressure reducer

25 of the present invention is also relatively easy to incorporate into existing liquid delivery systems.

**BRIEF DESCRIPTION OF THE DRAWINGS**

Preferred exemplary embodiments of the invention are illustrated in the accompanying drawings in which like reference numerals represent like parts throughout, and in which:

5            Fig. 1 is a partially sectional side elevation view of a pressurized liquid dispensing system forming an example of a liquid delivery system constructed in accordance with a first preferred embodiment of the present invention and having a pressure reducer located at a distance from a faucet of the system;

            Fig. 2 is a partially sectional perspective view of the pressure reducer shown in Fig.

10    1;

            Fig. 3 is an exploded perspective view of a portion of the pressure reducer of Fig. 2;

            Fig. 4 is a side elevation view of the portion of the pressure reducer of Fig. 3;

            Fig. 5 is a partially sectional side elevation view of a pressurized liquid dispensing system forming a liquid delivery system constructed in accordance with a second preferred  
15    embodiment of the present invention and having a pressure reducer located close to the faucet;

            Fig. 6 is a sectional side elevation view of the pressure reducer shown in Fig. 5;

            Fig. 7 is a graph illustrating pressure reducer restrictor segment number versus pressure drop for one embodiment of a pressure reducer constructed in accordance with the  
20    invention; and

            Fig. 8 is a graph illustrating pressure reducer restrictor segment number versus pressure drop for another embodiment of a pressure reducer constructed in accordance with the invention.

25

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

### 1. Resume

A pressure reducer is provided for use in a liquid delivery system that requires its liquid contents to be pressurized to a first, relatively high pressure but also requires that the liquid be delivered to a downstream location such as a faucet at a second, relatively low pressure. The pressure reducer reduces the pressure of the flowing liquid by repeatedly imparting directional changes to the liquid. Preferably, the pressure reducer comprises a restrictor formed from a plurality of aligned segments, each of which is configured to divide the liquid into two or more diverging streams and to recombine the streams at the end of the segment. Each segment preferably comprises a curved blade having opposed generally helical surfaces that border one of two divided liquid streams. The device may be located either remote from or adjacent the faucet or other terminal point of the liquid delivery system and can include either a single passage or multiple parallel passages. Each embodiment preferably comprises a section that helps straighten flow at the end of the pressure reducer.

### 2. Description of First Preferred Embodiment

Referring to Fig. 1, a pressurized liquid delivery system 110 incorporating a pressure reducer constructed in accordance with a first preferred embodiment of the invention comprises a liquid source 112, a liquid line 114, and a destination 116. The components 112, 114, and 116 may differ widely depending on the application. In the illustrated embodiment in which the system is configured to dispense beer, 1) the source 112 comprises a barrel, 2) the line 114 comprises a relatively long trunk housing 118 and a shorter standard tubing section 120 at the downstream end of the line 114, and 3) the destination comprises a dispensing faucet 116. The barrel 112 is a standard pressurized barrel having a dispensing coupling 122. The trunk housing 118 comprises a line imbedded in a liquid-cooled casing in a known manner. A volumetric pump 124 is located in the trunk housing 118 adjacent the barrel 112 and is configured to pump beer from the barrel 112 to the dispensing faucet 116 at a designated pressure rated to obtain a desired volumetric flow rate at the faucet 116. The dispensing faucet 116 may be located remote from the barrel 112 (sometimes in excess of 300 feet) and is mounted on a dispensing tower 126 extending upwardly from a counter (not shown) at a location with is typically disposed at a substantial distance above the barrel 112. Although only a single faucet 116 is illustrated, many dispensing systems will include multiple faucets, each of which is supplied with beer from a respective barrel and a respective line.

A pressure reducer 18 is located within the liquid line 114 between the barrel 112 and the faucet 116. It is typically located in the standard tubing section 120 adjacent the dispensing tower 126. It is configured to reduce the line pressure at the faucet 116 sufficiently to obtain a velocity at the faucet 116 that optimizes the flow of beer from the faucet. The pressure reducer 18 of this embodiment has a housing 22 containing a single passage 24 that houses a stationary restrictor 27. The housing 22 is coupled to the tubing sections by a pair of standard unions 25, one of which is located at each end of the housing. The restrictor 27 is configured to impart a pressure drop to liquid flowing through the housing 22 by imparting repeated directional changes to the flowing liquid. In the illustrated embodiment, the restrictor 27 takes the form of a series of sections, each of which includes curved sections 26 distributed along a central axis 28 of the passage 24 as best seen in Fig. 2. The sections 26 are preferably in tight association with the walls of the passage 24 so they do not rotate. The sections 26 are connected to one another by short posts 30 that extend along the central axis 28 and that also separate the blades 26 from one another or, alternatively, could be molded end-to-end with no connecting pegs.

As is best seen in Figs. 3 and 4, each section 26 of this embodiment takes the form of a curved blade and, accordingly will hereafter be referred to as a "blade." Each blade 26 has a leading edge 32 and a trailing edge 34, as well as a first and second opposed side surface 36, 38, and is generally rectangular in shape when viewed in elevation. Between the two edges 32, 34, each blade 26 is twisted in a generally helical or toroidal fashion to make a 180° turn around the axis 28, giving each blade 26 a pair of helical edges 40, 42 and providing each blade 26 with either a clockwise or counterclockwise directional aspect in which the downstream edge 34 extends in parallel with the upstream edge 32. The pitch of each blade 26 is determined by the axial extent required to make the 180° turn. The illustrated blades have a medium pitch, each having a length of 7/32". A structure suitable for use as the restrictor 27, but heretofore designed for use solely as a stationary or motionless mixer, is a mixing rod available from ConPro Tec. Inc. under the tradename Statomix®. See <http://www.mixpac.com>. The mixing rod marketed by ConPro is configured to mix streams of epoxy glue or the like so as to dispense an admixture from the end of the device. The mixing rod as used in a pressure reducer in accordance with the invention therefore can be thought of as "a mixing rod restrictor."

The individual blades 26 of the restrictor 27 are arranged in segments 44 of two blades 26 each, and each segment 44 comprises one clockwise curving or "right-hand" blade



26 and one counterclockwise curving or "left-hand" blade 26. In addition, the leading edge 32 of each blade 26 extends at least generally perpendicularly with respect to the trailing edge 34 of the adjacent upstream blade. Referring to both Figs. 2 and 3, it can be seen that the blade 26' at the most upstream position within the pressure reducer 18 bears a wedge-shaped dividing bar 48 on its leading edge 32. Fig. 2 shows that the blade 26'' in the most downstream position bears a similarly shaped recombining bar 50 on its trailing edge 34. Recombining bar 50 also acts a flow straightener that helps straighten flow into downstream portions of the system. It could be replaced or supplemented by a partial blade 26'' that curves in the opposite direction of the downstream-most complete blade. In the illustrated embodiment, it is attached to a partial blade 26'' forming the downstream end of the restrictor 27. In addition or instead of occurring through operation of the recombining bar 50 and/or the partial blade 26'', flow straightening could be accomplished by altering the pitch on the downstream end portion of the downstream-most blade 26''. It is also replaced or supplemented by an outwardly-flared section 52 of the housing 22 that is located downstream from the restrictor 27.

In use, when the liquid in the system 110 reaches the dividing bar 48 of the pressure restrictor 27, the dividing bar 48 divides the single liquid stream from the liquid source 112 into two diverging streams. Each stream of liquid passes over one of the curved sides 36, 38 of the blade 26', thus imparting the clockwise directional aspect of the blade 26', on each of the two streams. The two streams reconverge at the downstream edge 38 of the blade 26' and the reconverged stream is quickly split again by the leading edge 32 of the next blade 26 in the series. The next blade 26, having an opposite directional aspect than the one prior to it, imparts an opposite directional flow to each of the liquid streams. The pattern of splitting, clockwise or clockwise deflection, converging, counterclockwise or clockwise deflection, and reconverging continues over each of the segments 44. Initial splitting is facilitated by the dividing bar 48 at the upstream-most end of the device 18, and ultimate recombination and flow straightening are facilitated by the partial blade 26'', recombining bar 50, and/or the flared end 52 of the housing 22.

By repeatedly imparting sharp directional changes to the flowing liquid, the relatively short pressure reducer 18 of the present invention produces a pressure drop that is as great as is provided by a dramatically longer piece of tubing. Additional pressure drop results from the repeated splitting and recombining of the liquid streams. The reduction in pressure across the pressure reducer 18 is therefore the sum of 1) the loss of velocity when liquid is required to change courses with every alternating blade 26, 2) the loss of velocity when a

liquid stream collides with another liquid stream, and 3) the loss of velocity caused by the increased surface area of the blades. The resulting restriction efficiency is dramatic. In fact, in a typical system, a 6" restrictor provides approximately the same pressure drop as an 18 foot long section of tubing of the type used in prior art systems. Of the three factors  
5 discussed above, the directional change is currently considered to be the most important in carrying out the goals of the invention. It should be emphasized, however, that a variety of structures performing any or all of these functions fall within the scope of the present invention.

The degree of pressure drop imparted by the pressure reducer 18 is determined by the  
10 dimension and pitch of the individual blades 26 and by the number of segments 44 in the restrictor 27. Hence, the magnitude of pressure drop can be precisely determined by selecting suitable combinations of blade characteristics and/or segment numbers and by assembling a pressure reducer 18 having the desired physical characteristics. Partial  
15 segments 44 or single or even partial blades 26 could also be utilized to further fine tune the pressure drop provided by the device 18. In the simplest case, in which the pressure reducer 18 is made simply by providing a designated number of segments 44 formed from blades 26 of common physical characteristics and by inserting the segments 44 in the housing 22, an experimentally-known correlation can be used to select the desired number segments. One  
20 such correlation is illustrated by the curve 60 in Figure 7, which illustrates pressure drop through a pressure reducer at a volumetric flow rate of 1 gal/min. The pressure reducer has an about a 1/4" diameter mixing rod housed in a 0.257" diameter housing. The pressure drop obtained through the use of a given number of restrictor segments is determined by the equation :  $y = 2.69x + 0.79$ , where x is the number of restrictor segments and y is the pressure reduction obtained as water flows through the pressure reducer at 1 gal/min. Curve  
25 60 illustrates that about a 7 psig pressure drop can be obtained by selecting two segments 44, about a 19 psig pressure drop can be obtained by selecting six segments 44, etc. The data used to prepare curve 60 is also reproduced in Table 1.

Table 1

| Number of<br>Blades | Measured<br>Pressure Drop<br>(PSIG) | Assembly<br>Pressure Drop<br>(PSIG) | Mixing Rod<br>Restriction<br>(PSIG) | Mixing Rod<br>Restriction per<br>Segment |
|---------------------|-------------------------------------|-------------------------------------|-------------------------------------|--|
| 2                   | 7.36                                | 1.8                                 | 5.8                                 | 2.90                                     |
| 4                   | 13.6                                | 1.8                                 | 11.8                                | 2.95                                     |
| 6                   | 19.0                                | 1.8                                 | 17.2                                | 2.87                                     |
| 8                   | 24.2                                | 1.8                                 | 22.4                                | 2.80                                     |
| 10                  | 29.7                                | 1.8                                 | 27.9                                | 2.79                                     |
| 12                  | 34.7                                | 1.8                                 | 32.9                                | 2.74                                     |
| 14                  | 39.8                                | 1.8                                 | 38.0                                | 2.71                                     |
| 16                  | 46.0                                | 1.8                                 | 44.2                                | 2.76                                     |
| AVERAGE             |                                     |                                     |                                     | 2.82                                     |

As an example of calculating the number of segments required for a typical system, assume that the system 110 of Fig. 1 is configured to deliver beer to the faucet 116 from the barrel 112. The ideal system delivers beer at about 1 gal/min at and a velocity of about 19.6 in/sec at atmospheric pressure (lower velocities would undesirably increase the fill time of a container, and higher pressures would render the dispensed beer undesirably frothy). At 1 gal/min, beer flows from a ½" OD (3/8" ID) line at a velocity of 19.6 in/sec when the line pressure at the faucet is at atmospheric pressure (14.7 psi). As is standard, the pump 124 forces beer into the downstream portions of the trunk housing 118 at a predetermined pressure set to overcome the maximum head losses encountered by a system having 300 feet of ½" OD (3/8" ID) line and having 4.4 psig head losses in the tower. The typical ½" OD tubing used in this type of system exhibits head losses of about 0.033 psi/ft. Hence, the typical pump has an output pressure of about 30 psi ( $14.7 + 4.4 + 300 \times 0.033$ ). If the distance from the pump to the faucet is only 50 feet, the pump 124 would supply an overpressure of about 10 psi. ( $85.1 - (14.7 + 4.4 + 250 \times 0.033)$ ). Referring to Table 1 and Fig. 7, the desired pressure drop can therefore be obtained by inserting 3.5 segments into the housing 22.

### 3. Structure of Second Preferred Embodiment

In another embodiment, illustrated in Figs. 5 and 6, the pressure reducer 318 is located within the upstream end of the outlet 216. As in the first embodiment, the source comprises a barrel, the outlet 216 comprises a faucet mounted on a tower 226, and the line comprises a trunk housing (not shown) and a short line segment 220. Liquid is pumped through the line 214 by a volumetric pump (not shown) connected to the trunk housing.

The pressure reducer 318 of this embodiment has a housing 322 have multiple passages and a separate restrictor in each passage. The illustrated housing has two parallel passages 324 and 324' separated from one another by a central divider 323. Each passage 324 and 324' contains a restrictor 327, 327' formed from a series of restriction blades 326 connected to one another by posts 330 to form interconnected segments 344 of two blades each in the same manner as in the first embodiment. This embodiment can also feature a recombining device 346 to help straighten flow for smoother dispensation at the liquid outlet 216. The recombining device 346 in this embodiment may be a bowl-shaped depression at the downstream end of the housing 322.

The pressure reducer 318 of this embodiment, while being more complex than the pressure reducer 18 of the first embodiment, is short enough to fit within an existing faucet 216 in an existing opening in the tower 226 while providing the same magnitude of pressure drop as the pressure reducer 18 of the first embodiment. The pressure reducer 318 therefore is usable in applications in which the line 214 is inaccessible.

The increased pressure drop per unit length afforded by the pressure reducer of this embodiment is due not only to the presence of multiple passages 324 and 324' in the housing 322, but also due to the fact the pressure drop per unit length varies inversely with the diameter of a pressure reducer. Hence, each relatively narrow restrictor 327, 327' produces a larger pressure drop than a wider restrictor of the same length. The effect of rod-diameter variation on per-segment restriction is demonstrated graphically by the curve 62 in Fig. 8, which illustrates pressure drop as water flows through a pressure reducer at 1 gal/min. The pressure reducer has about a 3/16" diameter restrictor rod housed in a 0.195" ID housing. The pressure drop provided by a restrictor having a given number of segments is determined by the equation :  $y = 13.03x - 5.99$ , where  $x$  is the number of restrictor segments and  $y$  is the pressure reduction obtained as water flows through the pressure reducer at 1 gal/min. Specifically, about a 21 total psig pressure drop is obtained with a two-segment restrictor, about a 35 psig total pressure drop is obtained with a 3 segment restrictor, etc. The data from Fig. 8 is tabulated in Table 2:

Table 2

| <b>Number of<br/>Blades</b> | <b>Measured<br/>Pressure Drop<br/>(PSIG)</b> | <b>Assembly<br/>Pressure<br/>Drop (PSIG)</b> | <b>Mixing Rod<br/>Restriction<br/>(PSIG)</b> | <b>Mixing Rod<br/>Restriction per<br/>Segment</b> |
|-----------------------------|--|--|--|---|
| 1                           | 9.2  | 2.2  | 7.0  | 7.0   |
| 2                           | 21.6   | 2.2  | 19.4   | 9.7   |
| 3                           | 34.8   | 2.2  | 32.6   | 10.9  |
| 4                           | 51.5   | 2.2  | 49.3   | 12.3  |
| 5                           | 59.4   | 2.2  | 57.2   | 11.4  |
| AVERAGE:                    |  |  |  | 10.3  |

Comparing the different slopes of the curves 60 and 62 reveals that the pressure drop offered by a pressure reducer can be precisely fine tuned not only by incorporating blades of different lengths or different pitches in the same pressure reducer, but also by incorporating blades of different diameters in the same pressure reducer.

Many changes and modifications could be made to the invention in addition to those discussed above. For instance, the inventive pressure reducer could be used in a wide variety of applications other than the dispensing of pressurized beverages. Alternative applications include as a flow restrictor in hydraulic system in which the need exists to reduce the pressure from a main pump to multiple lines serviced by the pump. The restrictor could also take many forms other than illustrated interconnected segments of curved blades, so long as the structure imparts the required repeated directional changes to the flowing liquid. Other changes will become apparent from the appended claims.

CLAIMS

I claim:

1. A pressurized liquid dispensing system comprising:  
a pressurized liquid source that is configured to deliver pressurized liquid at a first,  
5 relatively high line pressure;  
a liquid dispenser that is located remote from said liquid source and that is configured  
to dispense liquid delivered thereto at a second, relatively low pressure;  
a liquid line connecting said liquid source to said liquid dispenser; and  
a pressure reducer device within said liquid line, said pressure reducer comprising a  
10 housing and a restrictor disposed within said housing, said housing having a first opening, a  
second opening, and at least one passage formed between said first and second openings, said  
restrictor being located in said passage and being configured to impart a series of directional  
changes to liquid flowing through said passage, thereby reducing the pressure of liquid  
flowing through said passage to at least approximately said second pressure.  
15
2. A system as recited in claim 1, wherein said restrictor comprises a plurality of flow  
divider segments located in series within said passage.
3. A system as recited in claim 2, wherein each of said flow divider segments is  
20 configured to sequentially divide liquid flowing therepast into multiple liquid streams and to  
recombine said multiple liquid streams.
4. A system as recited in claim 3, wherein each of said flow divider segments comprises  
a generally helically curved blade having a leading edge, a trailing edge, and opposed curved  
25 surfaces, each of which is configured to border one of said liquid streams.
5. A system as recited in claim 4, wherein said curved blades are arranged end-to-end  
such that, with the exception of a last curved blade of said pressure reducer, the trailing edge  
of each curved blade extends at least generally perpendicularly to the leading edge of an  
30 adjacent downstream blade.

6. A liquid flow pressure reducer comprising:
- (A) a housing having an inlet opening, an outlet opening, and at least one passage formed between said inlet opening and said outlet opening; and
- (B) a restrictor formed from a plurality of flow divider segments located within  
5 said passage, each of said flow divider segments being configured to sequentially divide liquid flowing therepast into multiple liquid streams and to recombine said multiple liquid streams while causing the flowing liquid to change directions.
7. A pressure reducer as recited in claim 6, wherein said flow divider segments are  
10 arranged in a pattern such that said segments alternate between segments having a first directional curvature and segments having a second directional curvature.
8. A pressure reducer as recited in claim 7, wherein each of said segments comprises a  
15 generally helically curved blade having a leading edge, a trailing edge, and opposed curved surfaces, each of which is configured to border one of said liquid streams.
9. A pressure reducer as recited in claim 8, wherein said curved blades are arranged end-to-end such that, with the exception of a last curved blade of said pressure reducer, the trailing edge of each curved blade extends at least generally perpendicularly to the leading  
20 edge of an adjacent downstream blade.
10. A pressure reducer as recited in claim 6, further comprising a flow divider bar mounted on the leading edge of an upstream-most segment of said restrictor and a flow straightener mounted on the trailing edge of a downstream-most segment of said restrictor.  
25
11. A pressure reducer as recited in claim 6, wherein said housing has a single passage.
12. A pressure reducer as recited in claim 6, wherein said housing has a plurality of passages, each of which houses a separate restrictor.  
30
13. A pressure reducer as recited in claim 12, wherein a chamber is provided within said housing toward said outlet opening to allow liquid from each passage to recombine and help straighten flow before exiting said outlet opening.

14. A method comprising:  
determining a pressure drop required in a liquid flow path to achieve a desired liquid pressure at an outlet of said flow path;  
determining properties of a pressure reducer required to obtain said pressure drop;  
5 and inserting a pressure reducer having said determined properties in said flow path.
15. A method as recited in claim 14, wherein the inserting step comprises inserting said pressure reducer in a liquid line of said flow path at a location remote from said outlet of said flow path.
- 10 16. A method as recited in claim 14, wherein the inserting step comprises inserting said pressure reducer into a tubing section and then coupling ends of said tubing section to adjacent sections of a liquid line of said flow path.
- 15 17. A method as recited in claim 14, wherein the inserting step comprises inserting said pressure reducer in a faucet having an outlet that forms an outlet path and that couples an inlet of said faucet to a liquid line of said flow path.
18. A method as recited in claim 14, wherein the step of determining properties  
20 comprises consulting tabulated data correlating pressure drop with flow reducer properties.
19. A method of reducing liquid pressure in a pressurized line, the method comprising:  
directing liquid through said pressurized line; and  
as said liquid flows through said pressurized line, deflecting said liquid through a  
25 plurality of repeated directional changes within a generally straight portion of said line.
20. A method as recited in claim 19, wherein the deflecting step comprises alternatively  
deflecting said liquid in a clockwise and counterclockwise rotation as said liquid flows  
through said generally straight portion of said pressurized line.
- 30 21. A method as recited in claim 20, further comprising, as said liquid is flowing through said generally straight portion of said pressurized line,  
dividing an undivided liquid stream into a first set of multiple streams and deflecting said first set of liquid streams in a first direction;



allowing said first set of multiple liquid streams to converge to form a combined liquid stream having a lower pressure than said undivided stream; then

dividing said combined liquid stream into a second set of multiple streams and deflecting said second set of liquid streams in a second direction; and

5 allowing said second set of liquid streams to reconverge to form a recombined liquid stream having a lower pressure than said combined liquid stream.

22. A method as recited in claim 21, wherein:

10 each of the dividing steps comprises directing a liquid stream over an edge of curved blade positioned within said liquid line,

each of the deflecting steps comprises directing a liquid stream over a toroidal major surface of said curved blade, and

each of the reconverging steps comprises directing divided liquid streams past a trailing edge of a curved blade and into contact with one another.

15


23. A method as recited in claim 22, wherein the dividing and converging steps comprise directing liquid past a first blade curved in a first direction and the redividing and reconverging steps comprise directing the liquid past a second curved blade curved in a second direction, said first and second blades being connected to one another in an end-to-end fashion, and a trailing edge of said second segment being positioned at an angle that is offset from an angle of a trailing edge of said first segment by 90 °.

20

24. A method as recited in claim 19, wherein liquid flows through a single passage during the pressure reduction operation.

25

25. A method as recited in claim 19, wherein liquid flows through multiple passages during the pressure reduction operation, said multiple passages having a common inlet and a common outlet, and a separate pressure reduction device being provided in each passage.

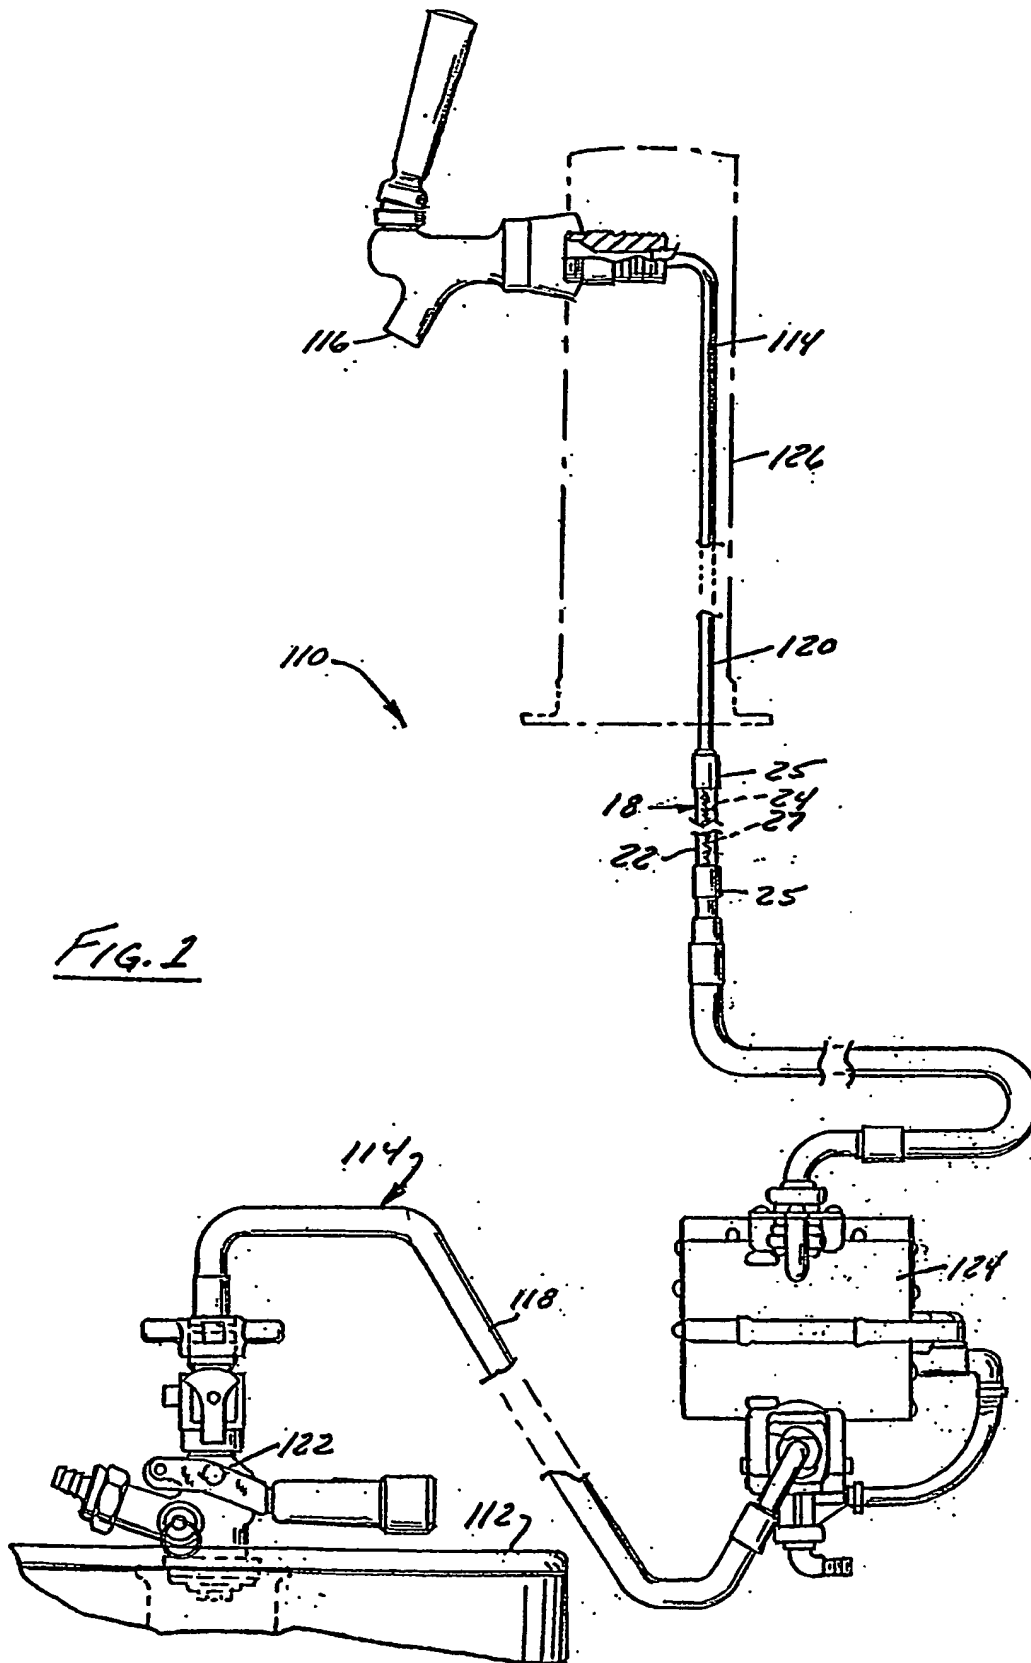

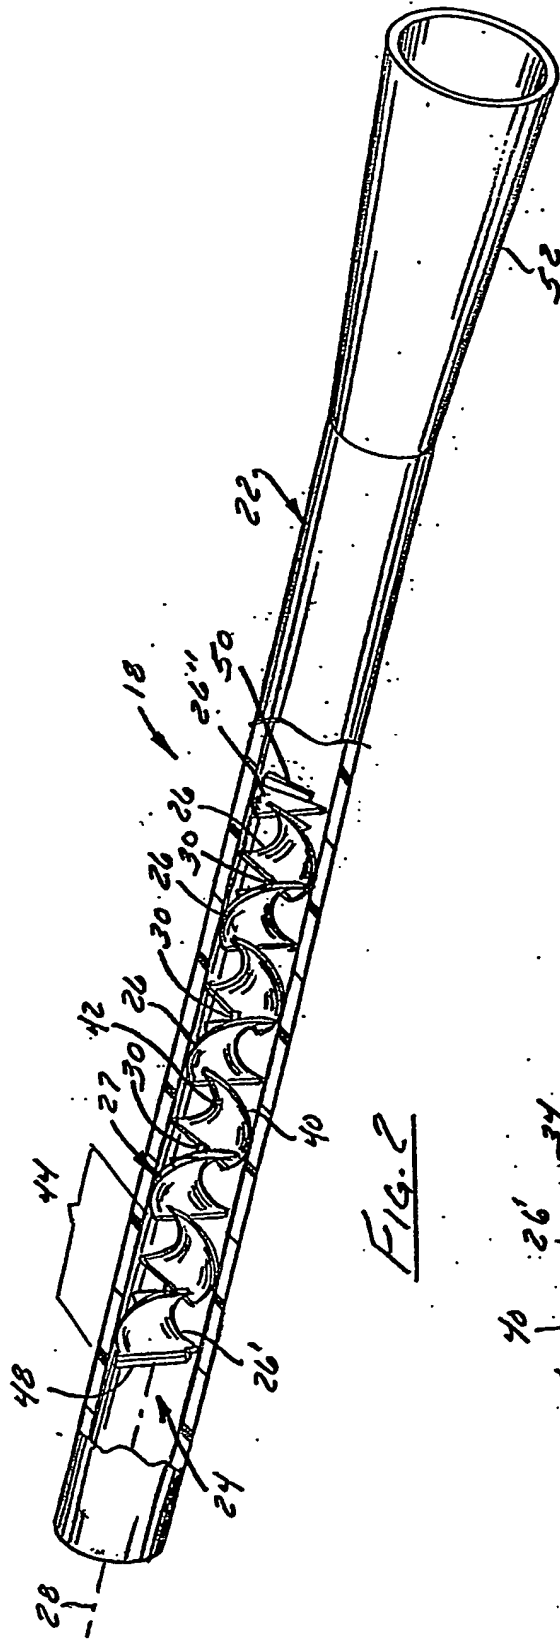


FIG. 2



FIG. 3

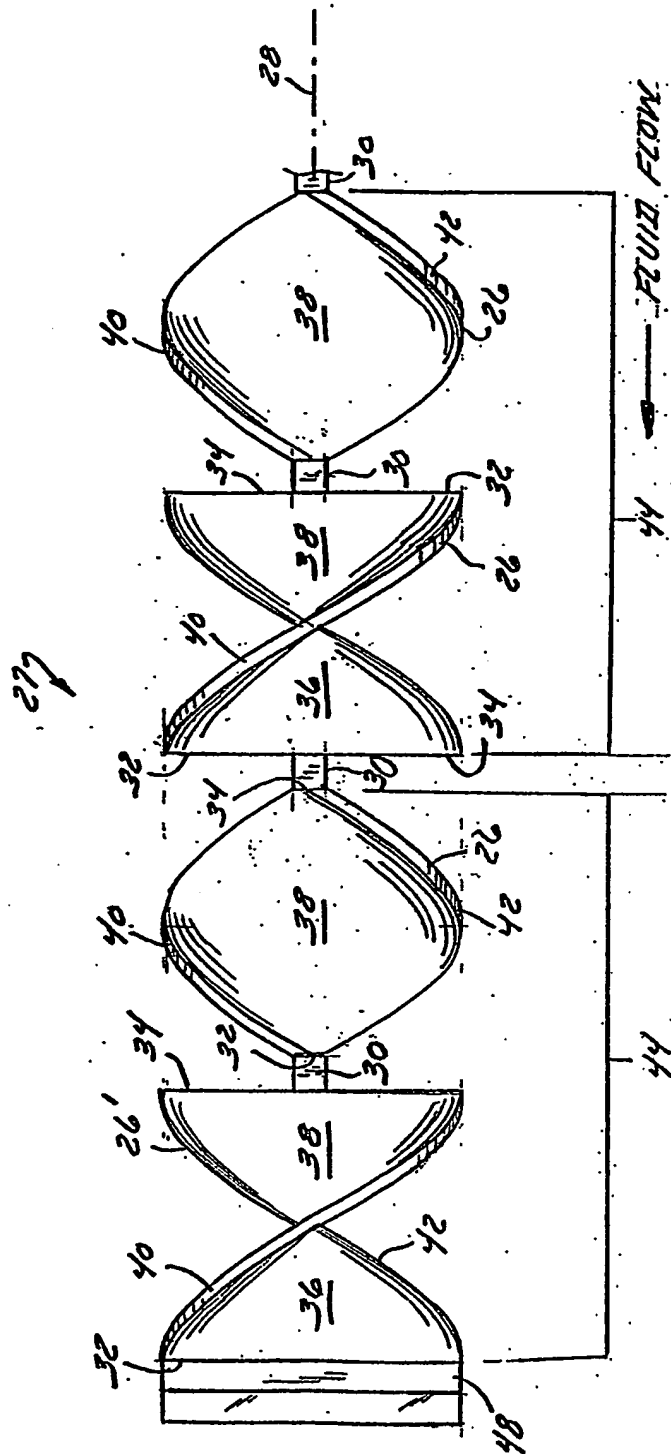


FIG. 4

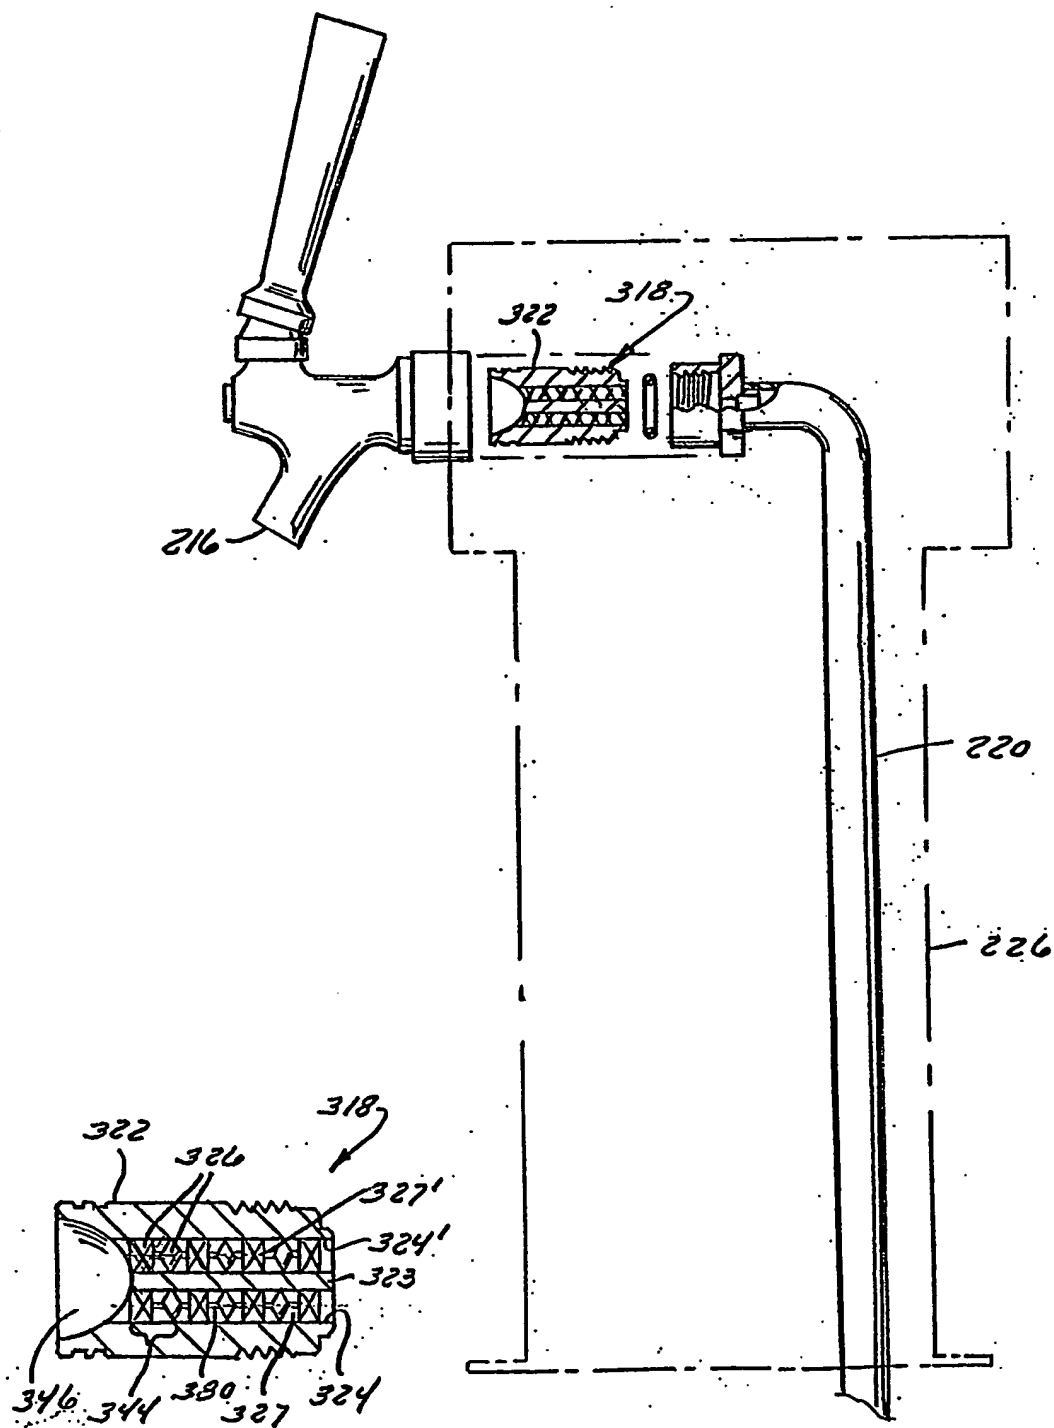


FIG. 6

FIG. 5

Mixing Rod Restrictor (0.253" Diameter Rod)


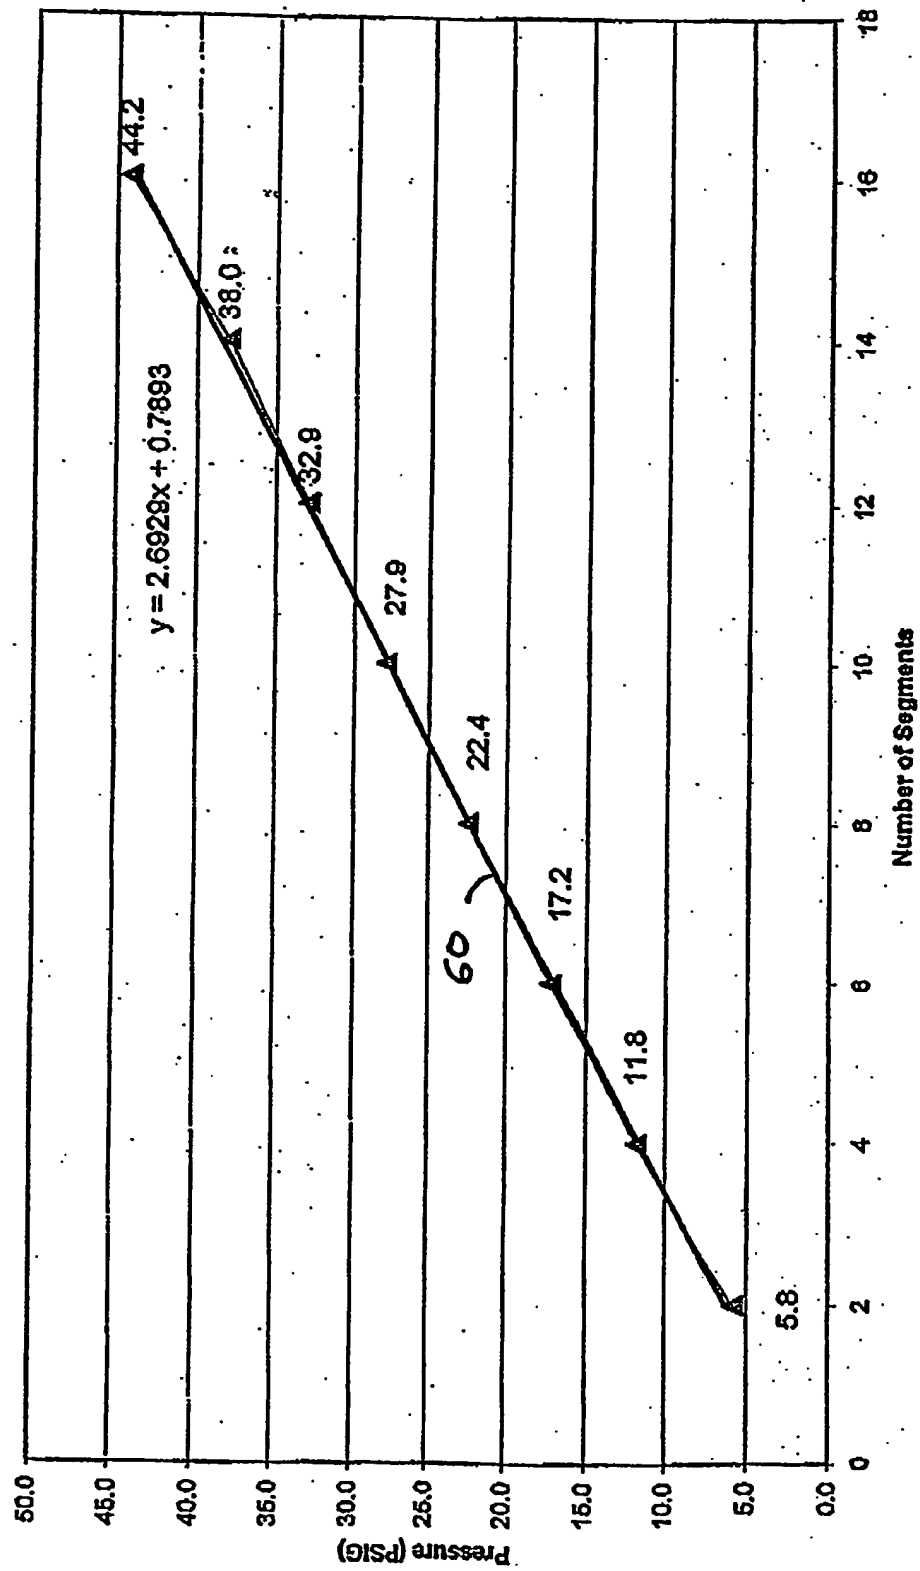


Fig. 7

Mixing Rod Restrictor (0.193" Diameter Rod)

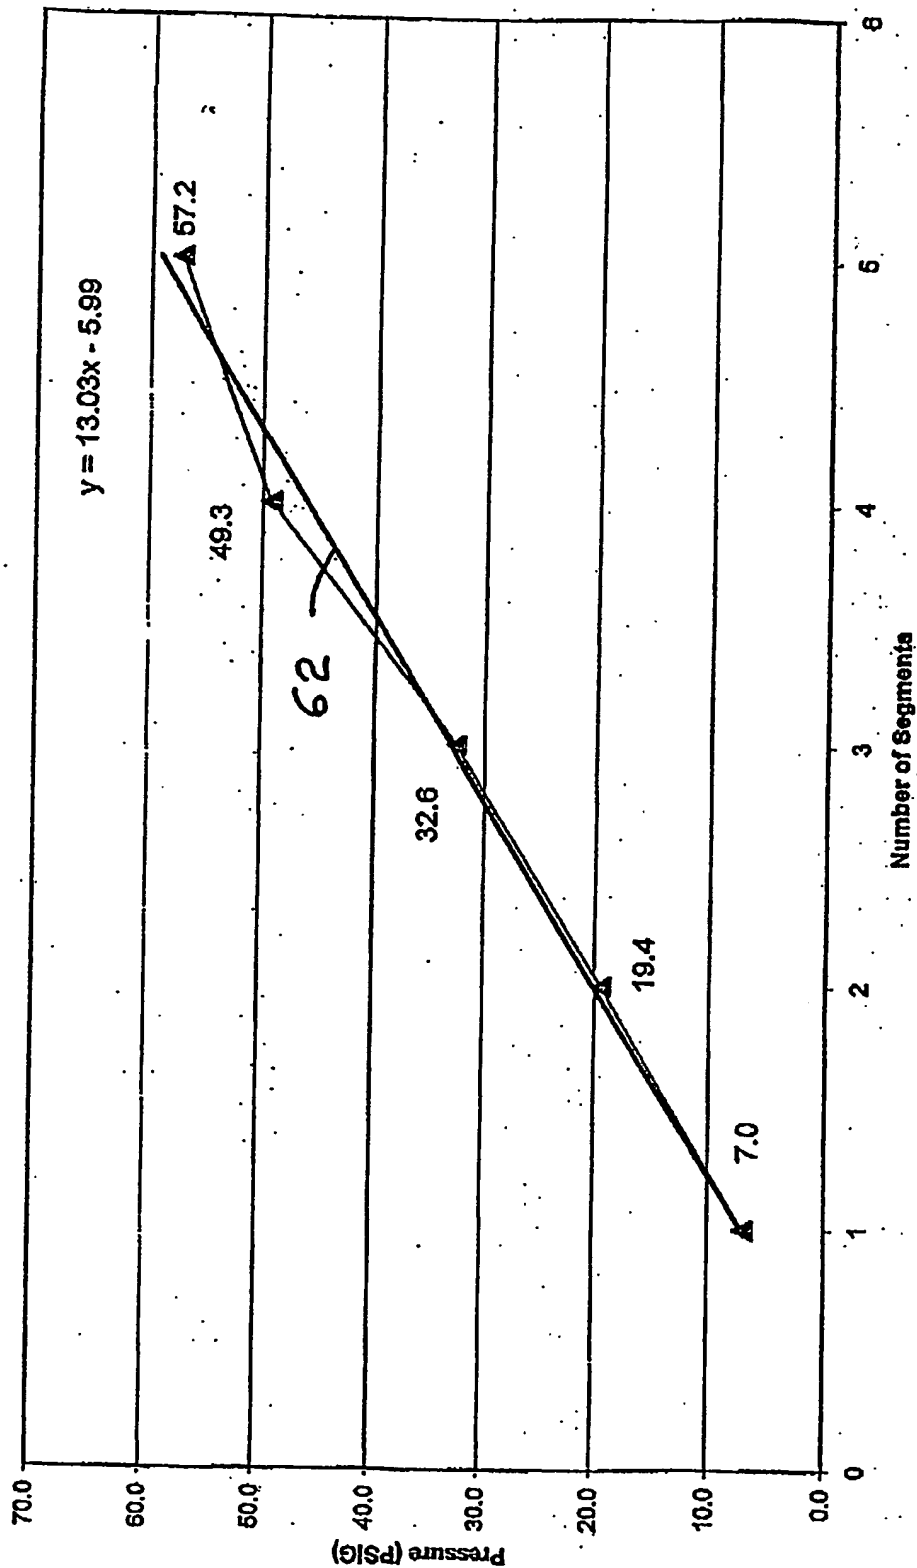

Number of Segments

Fig. 8

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
15 May 2003 (15.05.2003)


PCT

(10) International Publication Number  
**WO 2003/040023 A3**

- (51) International Patent Classification<sup>7</sup>: B67D 1/14, 1/12
- (21) International Application Number:  
PCT/US2002/035682
- (22) International Filing Date:  
6 November 2002 (06.11.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
09/993,103 6 November 2001 (06.11.2001) US
- (71) Applicants (*for all designated States except US*): PER-  
LICK CORPORATION [US/US]; 8300 West Good Hope  
Road, Milwaukee, WI 53223 (US). VENT-MATIC CO.,  
INC. [US/US]; 757 North Broadway, Suite 700, Milwau-  
kee, WI 53202 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): AMIDZICH,  
Bradford, G. [US/US]; 34339 Venice Beach Road,  
Oconomowoc, WI 53060 (US).
- (74) Agent: NEWHOLM, Timothy, E.; Boyle Fredrickson  
Newholm Stein & Gratz S.C., 250 East Wisconsin Avenue,  
Suite 1030, Milwaukee, WI 53202 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,  
SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,  
VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: TAP WITH PRESSURE REDUCER

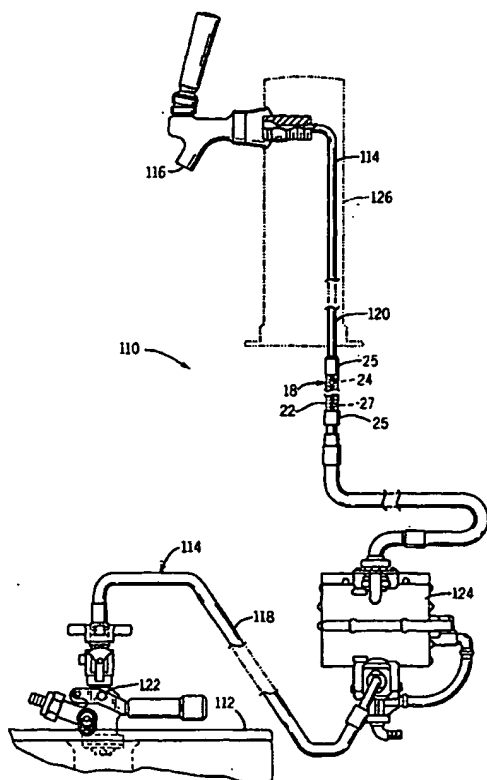

(57) Abstract: A pressure reducer (18; 318) is configured for use in a liquid delivery system that requires its liquid contents to be pressurized to a first, relatively high pressure but also requires that the liquid be delivered to a downstream location such as a faucet at a second, relatively low pressure. The pressure reducer reduces the pressure of the flowing liquid by repeatedly imparting directional changes to the liquid. Preferably, the pressure reducer comprises a stationary restrictor (27; 327, 327'), having multiple aligned segments, each of which is configured to divide the liquid into two or more diverging streams and to recombine the streams at the end of the segment. Each segment preferably comprises a curved blade (26; 326) having opposed generally toroidal surfaces that border one of two divided liquid streams.

WO 2003/040023 A3





European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

#### Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)
- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG,

KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations
- of inventorship (Rule 4.17(iv)) for US only

#### Published:

- with international search report

(88) Date of publication of the international search report:  
4 March 2004

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 02/35682

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B67D1/14 B67D1/12

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B67D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages                                      | Relevant to claim No. |
|------------|---|-----------------------|
| X          | US 2 132 011 A (RAY BENNETT V ET AL)<br>4 October 1938 (1938-10-04)<br>the whole document<br>---                        | 1-3,6,<br>10,11,19    |
| X          | DE 198 02 291 A (MOGLER GMBH & CO GEB)<br>5 August 1999 (1999-08-05)<br>column 1, line 23 - line 50; figures 1-9<br>--- | 1                     |
| A          | EP 0 285 769 A (COORS CO ADOLPH)<br>12 October 1988 (1988-10-12)<br>---   |                       |
| A          | DE 37 07 128 A (KNOPF KARL HORST)<br>15 September 1988 (1988-09-15)<br>-----  |                       |

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&amp;" document member of the same patent family

Date of the actual completion of the international search

10 April 2003

Date of mailing of the international search report

06. 10. 2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Müller, C

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US 02/35682

## Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
  
2. ☐ Claims Nos.:  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
  
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
  
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
  
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
  
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:  
1-13, 19-25

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-13, 19-25

Pressurized liquid dispensing system and method

2. Claims: 14-18

Method for determining an appropriate pressure reducer

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 02/35682

| Patent document<br>cited in search report |   | Publication<br>date | Patent family<br>member(s) | Publication<br>date |
|---|---|---------------------|----------------------------|---------------------|
| US 2132011                                | A | 04-10-1938          | NONE                       |                     |
| DE 19802291                               | A | 05-08-1999          | DE 19802291 A1             | 05-08-1999          |
| EP 0285769                                | A | 12-10-1988          | US 4739901 A               | 26-04-1988          |
|   |   |                     | AU 589057 B2               | 28-09-1989          |
|   |   |                     | AU 1031788 A               | 06-10-1988          |
|   |   |                     | CA 1277643 C               | 11-12-1990          |
|   |   |                     | EP 0285769 A1              | 12-10-1988          |
|   |   |                     | JP 63272695 A              | 10-11-1988          |
|   |   |                     | NZ 223147 A                | 21-12-1989          |
| DE 3707128                                | A | 15-09-1988          | DE 3707128 A1              | 15-09-1988          |

CORRECTED VERSION

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
15 May 2003 (15.05.2003)


PCT

(10) International Publication Number  
**WO 2003/040023 A3**

- (51) International Patent Classification<sup>7</sup>: B67D 1/14, 1/12 (72) Inventor; and  
(21) International Application Number: PCT/US2002/035682 (75) Inventor/Applicant (for US only): AMIDZICH, Bradford, G. [US/US]; 34339 Venice Beach Road, Oconomowoc, WI 53060 (US).  
(22) International Filing Date: 6 November 2002 (06.11.2002) (74) Agent: NEWHOLM, Timothy, E.; Boyle Fredrickson Newholm Stein & Gratz S.C., 250 East Wisconsin Avenue, Suite 1030, Milwaukee, WI 53202 (US).  
(25) Filing Language: English  
(26) Publication Language: English  
(30) Priority Data: 09/993,103 6 November 2001 (06.11.2001) US  
(71) Applicants (for all designated States except US): PER-LICK CORPORATION [US/US]; 8300 West Good Hope Road, Milwaukee, WI 53223 (US). VENT-MATIC CO., INC. [US/US]; 757 North Broadway, Suite 700, Milwaukee, WI 53202 (US).  
(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

[Continued on next page]

(54) Title: TAP WITH PRESSURE REDUCER

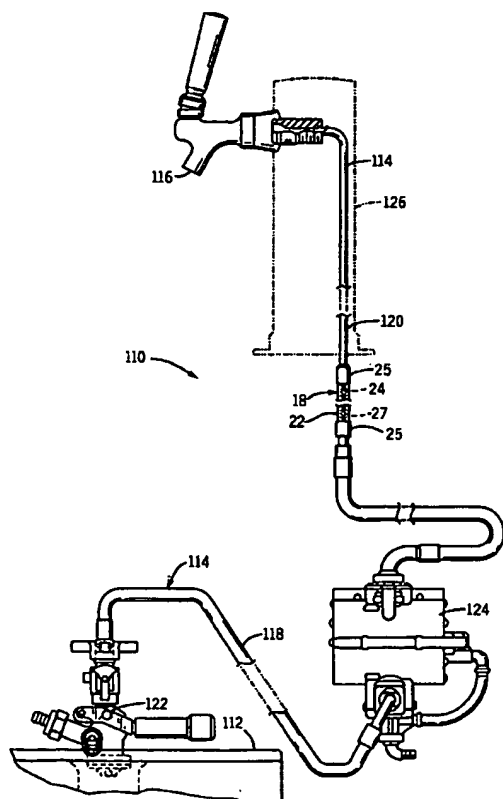

(57) Abstract: A pressure reducer (18; 318) is configured for use in a liquid delivery system that requires its liquid contents to be pressurized to a first, relatively high pressure but also requires that the liquid be delivered to a downstream location such as a faucet at a second, relatively low pressure. The pressure reducer reduces the pressure of the flowing liquid by repeatedly imparting directional changes to the liquid. Preferably, the pressure reducer comprises a stationary restrictor (27; 327, 327'), having multiple aligned segments, each of which is configured to divide the liquid into two or more diverging streams and to recombine the streams at the end of the segment. Each segment preferably comprises a curved blade (26; 326) having opposed generally toroidal surfaces that border one of two divided liquid streams.

WO 2003/040023 A3



(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Declarations under Rule 4.17:**

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations* AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)
- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations* AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD,

SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations of inventorship (Rule 4.17(iv)) for US only*

**Published:**

- *with international search report*

(88) Date of publication of the International search report:  
4 March 2004

(48) Date of publication of this corrected version:  
1 April 2004

**(15) Information about Correction:**

see PCT Gazette No. 14/2004 of 1 April 2004, Section II

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

CORRECTED VERSION

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
15 May 2003 (15.05.2003)


PCT

(10) International Publication Number  
WO 2003/040023 A3

- (51) International Patent Classification<sup>7</sup>: B67D 1/14, 1/12  
(21) International Application Number: PCT/US2002/035682  
(22) International Filing Date: 6 November 2002 (06.11.2002)  
(25) Filing Language: English  
(26) Publication Language: English  
(30) Priority Data: 09/993,103 6 November 2001 (06.11.2001) US  
(71) Applicants (for all designated States except US): PER-LICK CORPORATION [US/US]; 8300 West Good Hope Road, Milwaukee, WI 53223 (US). VENT-MATIC CO., INC. [US/US]; 757 North Broadway, Suite 700, Milwaukee, WI 53202 (US).  
(72) Inventor; and  
(75) Inventor/Applicant (for US only): AMIDZICH, Bradford, G. [US/US]; 34339 Venice Beach Road, Oconomowoc, WI 53060 (US).  
(74) Agent: NEWHOLM, Timothy, E.; Boyle Fredrickson Newholm Stein & Gratz S.C., 250 East Wisconsin Avenue, Suite 1030, Milwaukee, WI 53202 (US).  
(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

[Continued on next page]

(54) Title: TAP WITH PRESSURE REDUCER

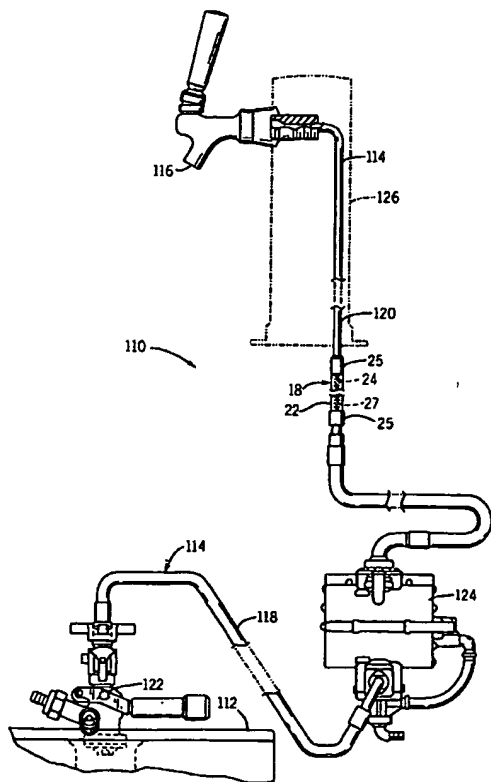

(57) Abstract: A pressure reducer (18; 318) is configured for use in a liquid delivery system that requires its liquid contents to be pressurized to a first, relatively high pressure but also requires that the liquid be delivered to a downstream location such as a faucet at a second, relatively low pressure. The pressure reducer reduces the pressure of the flowing liquid by repeatedly imparting directional changes to the liquid. Preferably, the pressure reducer comprises a stationary restrictor (27; 327, 327'), having multiple aligned segments, each of which is configured to divide the liquid into two or more diverging streams and to recombine the streams at the end of the segment. Each segment preferably comprises a curved blade (26; 326) having opposed generally toroidal surfaces that border one of two divided liquid streams.

WO 2003/040023 A3





(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Declarations under Rule 4.17:**

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)
- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ,

VC, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations of inventorship (Rule 4.17(iv)) for US only

**Published:**

- with international search report

(88) Date of publication of the international search report:  
4 March 2004

(48) Date of publication of this corrected version:  
6 May 2004

**(15) Information about Corrections:**

see PCT Gazette No. 19/2004 of 6 May 2004, Section II  
Previous Correction:  
see PCT Gazette No. 14/2004 of 1 April 2004, Section II

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

## LIQUID FLOW PRESSURE REDUCER AND METHOD

### BACKGROUND OF THE INVENTION

5    1.    Field of Invention

The present invention relates to the delivery of pressurized liquids, and, more particularly, to a method and device for reducing the pressure of a liquid flowing through a pressurized liquid system to a desired level.

10   2.    Discussion of Related Art

In a liquid delivery system, it is often necessary to initially increase the line pressure in the system to a relatively high level and to subsequently decrease the line pressure at a downstream location in the system. "Line pressure" can be considered the pressure in a line or other flow path connecting a pressurized source to a downstream point in the system. The  
15   need for a relatively high initial line pressure and a lower downstream line pressure is especially evident in typical beverage delivery systems, which dispense liquid from a source located some distance from, and often underneath, the liquid outlet. The liquid must be pressurized to overcome gravitational forces and head losses that resist liquid flow from the liquid source to the liquid outlet. Furthermore, when the liquid to be dispensed at the outlet  
20   is carbonated, such as with beer or soda, the liquid must also be kept under pressure to prevent a loss of carbonation. However, the initial line pressure required for the system is often too high for proper subsequent dispensation at the outlet or other ultimate use of the liquid. This overpressurization is particularly detrimental in the field of carbonated beverage delivery because the overpressurization at the system's faucet will cause the liquid to be  
25   dispensed at a higher-than desired velocity, resulting in the dispensing of an overly-foamy beverage.

Prior art beverage dispensing systems that have addressed these problems have reduced line pressure by relying on head losses within an additional tubing section. Specifically, in some beer dispensing systems, the system is shipped to an intended installation with a standard length of Mayon tubing (typically 4.5') as well as a standard additional length or "coolant loop" of copper tubing designed to provide the head losses required of a "typical" system. Then, the length of additional tubing actually required to create the correct restriction for that particular installation is determined, and the "standard" system is modified as necessary to provide the required restriction for that installation. In about 75% of systems, the "standard" restriction is inadequate, and as much as an additional 20' of Mayon tubing must be installed in the system. The existing copper tubing coolant loop leads must be lengthened by means of soldering on extensions to match the length of Mayon tubing. The Mayon tubing is then secured to the coolant leads first with filament tape and then with a polymer tape. The coolant lines and Mayon tubing bundle are then insulated from the bottom of the dispensing head to the end of the leads with six foot sections of Armaflex insulation, and the seams of the Armaflex are glued and taped together. If less than "standard" restriction is required, some Mayon tubing must be removed from the system, and the coolant leads must be shortened to match the Mayon tubing. The tubing must then be taped and insulated as described above.

It can thus be seen that the extra tubing is cumbersome to use, especially in installations in which many liquid lines must be placed in a relatively small area, as in many taverns. It is also difficult to install. These problems are especially severe in systems having beer pumps. These systems typically operate at a minimum pressure of 25 psig and often supply beer to multiple faucets through a multi-way manifold. The constant applied pressure leads to a reduction in flow. Additional restriction therefore is required to maintain the natural carbonation level of the products within the system to avoid breakout of the carbon-dioxide from the beverage and resulting foaming at the faucet.

Hence, the need has arisen to provide a pressure reducer for a fluid delivery system that is compact and simple in construction, that is easy to install, and that can be easily tailored to meet the pressure reduction needs of a particular system.

### SUMMARY OF THE INVENTION

The present invention relates to a simplified method and apparatus for obtaining a desired pressure drop in a liquid flowing through an enclosed path of a fluid delivery system. Instead of employing an extra length of coil or a complex variable or fixed orifice flow restrictor, the present invention employs a special type of pressure reducer within the flow path to achieve the desired reduction in pressure. Specifically, the device is configured to impart repeated directional changes to liquid flowing through the path. The directional changes necessarily reduce the liquid's momentum, hence reducing its pressure. Preferably, the pressure reducer includes a stationary restrictor that repeatedly splits the liquid into multiple (at least two) liquid streams, recombines the divided streams, then divides the recombined streams, etc. In a preferred embodiment, the restrictor includes a plurality of flow divider segments that are located within the passage and that are each configured to sequentially divide liquid flowing therepast into multiple liquid streams and to recombine the multiple liquid streams while causing the flowing liquid to change directions. Preferably, the flow divider segments are arranged in a pattern such that the segments alternate between segments having a first directional curvature and segments having a second directional curvature. Each of the segments may comprise a generally helically curved blade having a leading edge, a trailing edge, and opposed curved surfaces, each of which is configured to border one of the liquid streams. The curved blades are arranged end-to-end such that the trailing edge of each curved blade extends at least generally perpendicularly to the leading edge of an adjacent downstream blade.

The pressure reducer has the advantage of being much smaller than extra coils of liquid line. A desired pressure drop can be obtained with high precision simply by properly selecting the configuration and/or number of segments in the restrictor. The pressure reducer of the present invention is also relatively easy to incorporate into existing liquid delivery systems.

### BRIEF DESCRIPTION OF THE DRAWINGS

Preferred exemplary embodiments of the invention are illustrated in the accompanying drawings in which like reference numerals represent like parts throughout, and in which:

5        Fig. 1 is a partially sectional side elevation view of a pressurized liquid dispensing system forming an example of a liquid delivery system constructed in accordance with a first preferred embodiment of the present invention and having a pressure reducer located at a distance from a faucet of the system;

10        Fig. 2 is a partially sectional perspective view of the pressure reducer shown in Fig. 1;

      Fig. 3 is an exploded perspective view of a portion of the pressure reducer of Fig. 2;

      Fig. 4 is a side elevation view of the portion of the pressure reducer of Fig. 3;

15        Fig. 5 is a partially sectional side elevation view of a pressurized liquid dispensing system forming a liquid delivery system constructed in accordance with a second preferred embodiment of the present invention and having a pressure reducer located close to the faucet;

      Fig. 6 is a sectional side elevation view of the pressure reducer shown in Fig. 5;

20        Fig. 7 is a graph illustrating pressure reducer restrictor segment number versus pressure drop for one embodiment of a pressure reducer constructed in accordance with the invention; and

      Fig. 8 is a graph illustrating pressure reducer restrictor segment number versus pressure drop for another embodiment of a pressure reducer constructed in accordance with the invention.

25

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

### 1. Resume

A pressure reducer is provided for use in a liquid delivery system that requires its liquid contents to be pressurized to a first, relatively high pressure but also requires that the liquid be delivered to a downstream location such as a faucet at a second, relatively low pressure. The pressure reducer reduces the pressure of the flowing liquid by repeatedly imparting directional changes to the liquid. Preferably, the pressure reducer comprises a restrictor formed from a plurality of aligned segments, each of which is configured to divide the liquid into two or more diverging streams and to recombine the streams at the end of the segment. Each segment preferably comprises a curved blade having opposed generally helical surfaces that border one of two divided liquid streams. The device may be located either remote from or adjacent the faucet or other terminal point of the liquid delivery system and can include either a single passage or multiple parallel passages. Each embodiment preferably comprises a section that helps straighten flow at the end of the pressure reducer.

### 2. Description of First Preferred Embodiment

Referring to Fig. 1, a pressurized liquid delivery system 110 incorporating a pressure reducer constructed in accordance with a first preferred embodiment of the invention comprises a liquid source 112, a liquid line 114, and a destination 116. The components 112, 114, and 116 may differ widely depending on the application. In the illustrated embodiment in which the system is configured to dispense beer, 1) the source 112 comprises a barrel, 2) the line 114 comprises a relatively long trunk housing 118 and a shorter standard tubing section 120 at the downstream end of the line 114, and 3) the destination comprises a dispensing faucet 116. The barrel 112 is a standard pressurized barrel having a dispensing coupling 122. The trunk housing 118 comprises a line imbedded in a liquid-cooled casing in a known manner. A volumetric pump 124 is located in the trunk housing 118 adjacent the barrel 112 and is configured to pump beer from the barrel 112 to the dispensing faucet 116 at a designated pressure rated to obtain a desired volumetric flow rate at the faucet 116. The dispensing faucet 116 may be located remote from the barrel 112 (sometimes in excess of 300 feet) and is mounted on a dispensing tower 126 extending upwardly from a counter (not shown) at a location with is typically disposed at a substantial distance above the barrel 112. Although only a single faucet 116 is illustrated, many dispensing systems will include multiple faucets, each of which is supplied with beer from a respective barrel and a respective line.

A pressure reducer 18 is located within the liquid line 114 between the barrel 112 and the faucet 116. It is typically located in the standard tubing section 120 adjacent the dispensing tower 126. It is configured to reduce the line pressure at the faucet 116 sufficiently to obtain a velocity at the faucet 116 that optimizes the flow of beer from the faucet. The pressure reducer 18 of this embodiment has a housing 22 containing a single passage 24 that houses a stationary restrictor 27. The housing 22 is coupled to the tubing sections by a pair of standard unions 25, one of which is located at each end of the housing. The restrictor 27 is configured to impart a pressure drop to liquid flowing through the housing 22 by imparting repeated directional changes to the flowing liquid. In the illustrated embodiment, the restrictor 27 takes the form of a series of sections, each of which includes curved sections 26 distributed along a central axis 28 of the passage 24 as best seen in Fig. 2. The sections 26 are preferably in tight association with the walls of the passage 24 so they do not rotate. The sections 26 are connected to one another by short posts 30 that extend along the central axis 28 and that also separate the blades 26 from one another or, alternatively, could be molded end-to-end with no connecting pegs.

As is best seen in Figs. 3 and 4, each section 26 of this embodiment takes the form of a curved blade and, accordingly will hereafter be referred to as a "blade." Each blade 26 has a leading edge 32 and a trailing edge 34, as well as a first and second opposed side surface 36, 38, and is generally rectangular in shape when viewed in elevation. Between the two edges 32, 34, each blade 26 is twisted in a generally helical or toroidal fashion to make a 180° turn around the axis 28, giving each blade 26 a pair of helical edges 40, 42 and providing each blade 26 with either a clockwise or counterclockwise directional aspect in which the downstream edge 34 extends in parallel with the upstream edge 32. The pitch of each blade 26 is determined by the axial extent required to make the 180° turn. The illustrated blades have a medium pitch, each having a length of 7/32". A structure suitable for use as the restrictor 27, but heretofore designed for use solely as a stationary or motionless mixer, is a mixing rod available from ConPro Tec. Inc. under the tradename Statomix®. See <http://www.mixpac.com>. The mixing rod marketed by ConPro is configured to mix streams of epoxy glue or the like so as to dispense an admixture from the end of the device. The mixing rod as used in a pressure reducer in accordance with the invention therefore can be thought of as "a mixing rod restrictor."

The individual blades 26 of the restrictor 27 are arranged in segments 44 of two blades 26 each, and each segment 44 comprises one clockwise curving or "right-hand" blade

26 and one counterclockwise curving or "left-hand" blade 26. In addition, the leading edge 32 of each blade 26 extends at least generally perpendicularly with respect to the trailing edge 34 of the adjacent upstream blade. Referring to both Figs. 2 and 3, it can be seen that the blade 26' at the most upstream position within the pressure reducer 18 bears a wedge-shaped dividing bar 48 on its leading edge 32. Fig. 2 shows that the blade 26'' in the most downstream position bears a similarly shaped recombining bar 50 on its trailing edge 34. Recombining bar 50 also acts a flow straightener that helps straighten flow into downstream portions of the system. It could be replaced or supplemented by a partial blade 26'' that curves in the opposite direction of the downstream-most complete blade. In the illustrated embodiment, it is attached to a partial blade 26'' forming the downstream end of the restrictor 27. In addition or instead of occurring through operation of the recombining bar 50 and/or the partial blade 26'', flow straightening could be accomplished by altering the pitch on the downstream end portion of the downstream-most blade 26''. It is also replaced or supplemented by an outwardly-flared section 52 of the housing 22 that is located downstream from the restrictor 27.

In use, when the liquid in the system 110 reaches the dividing bar 48 of the pressure restrictor 27, the dividing bar 48 divides the single liquid stream from the liquid source 112 into two diverging streams. Each stream of liquid passes over one of the curved sides 36, 38 of the blade 26', thus imparting the clockwise directional aspect of the blade 26', on each of the two streams. The two streams reconverge at the downstream edge 38 of the blade 26' and the reconverged stream is quickly split again by the leading edge 32 of the next blade 26 in the series. The next blade 26, having an opposite directional aspect than the one prior to it, imparts an opposite directional flow to each of the liquid streams. The pattern of splitting, clockwise or clockwise deflection, converging, counterclockwise or clockwise deflection, and reconverging continues over each of the segments 44. Initial splitting is facilitated by the dividing bar 48 at the upstream-most end of the device 18, and ultimate recombination and flow straightening are facilitated by the partial blade 26'', recombining bar 50, and/or the flared end 52 of the housing 22.

By repeatedly imparting sharp directional changes to the flowing liquid, the relatively short pressure reducer 18 of the present invention produces a pressure drop that is as great as is provided by a dramatically longer piece of tubing. Additional pressure drop results from the repeated splitting and recombining of the liquid streams. The reduction in pressure across the pressure reducer 18 is therefore the sum of 1) the loss of velocity when liquid is required to change courses with every alternating blade 26, 2) the loss of velocity when a



liquid stream collides with another liquid stream, and 3) the loss of velocity caused by the increased surface area of the blades. The resulting restriction efficiency is dramatic. In fact, in a typical system, a 6" restrictor provides approximately the same pressure drop as an 18 foot long section of tubing of the type used in prior art systems. Of the three factors  
5 discussed above, the directional change is currently considered to be the most important in carrying out the goals of the invention. It should be emphasized, however, that a variety of structures performing any or all of these functions fall within the scope of the present invention.

The degree of pressure drop imparted by the pressure reducer 18 is determined by the  
10 dimension and pitch of the individual blades 26 and by the number of segments 44 in the restrictor 27. Hence, the magnitude of pressure drop can be precisely determined by selecting suitable combinations of blade characteristics and/or segment numbers and by assembling a pressure reducer 18 having the desired physical characteristics. Partial segments 44 or single or even partial blades 26 could also be utilized to further fine tune the  
15 pressure drop provided by the device 18. In the simplest case, in which the pressure reducer 18 is made simply by providing a designated number of segments 44 formed from blades 26 of common physical characteristics and by inserting the segments 44 in the housing 22, an experimentally-known correlation can be used to select the desired number segments. One such correlation is illustrated by the curve 60 in Figure 7, which illustrates pressure drop  
20 through a pressure reducer at a volumetric flow rate of 1 gal/min. The pressure reducer has an about a 1/4" diameter mixing rod housed in a 0.257" diameter housing. The pressure drop obtained through the use of a given number of restrictor segments is determined by the equation :  $y = 2.69x + 0.79$ , where x is the number of restrictor segments and y is the pressure reduction obtained as water flows through the pressure reducer at 1 gal/min. Curve  
25 60 illustrates that about a 7 psig pressure drop can be obtained by selecting two segments 44, about a 19 psig pressure drop can be obtained by selecting six segments 44, etc. The data used to prepare curve 60 is also reproduced in Table 1.

Table 1

| Number of<br>Blades | Measured<br>Pressure Drop<br>(PSIG) | Assembly<br>Pressure Drop<br>(PSIG) | Mixing Rod<br>Restriction<br>(PSIG) | Mixing Rod<br>Restriction per<br>Segment |
|---------------------|-------------------------------------|-------------------------------------|-------------------------------------|--|
| 2                   | 7.36                                | 1.8                                 | 5.8                                 | 2.90                                     |
| 4                   | 13.6                                | 1.8                                 | 11.8                                | 2.95                                     |
| 6                   | 19.0                                | 1.8                                 | 17.2                                | 2.87                                     |
| 8                   | 24.2                                | 1.8                                 | 22.4                                | 2.80                                     |
| 10                  | 29.7                                | 1.8                                 | 27.9                                | 2.79                                     |
| 12                  | 34.7                                | 1.8                                 | 32.9                                | 2.74                                     |
| 14                  | 39.8                                | 1.8                                 | 38.0                                | 2.71                                     |
| 16                  | 46.0                                | 1.8                                 | 44.2                                | 2.76                                     |
| AVERAGE             |                                     |                                     |                                     | 2.82                                     |

As an example of calculating the number of segments required for a typical system, assume that the system 110 of Fig. 1 is configured to deliver beer to the faucet 116 from the barrel 112. The ideal system delivers beer at about 1 gal/min at and a velocity of about 19.6 in/sec at atmospheric pressure (lower velocities would undesirably increase the fill time of a container, and higher pressures would render the dispensed beer undesirably frothy). At 1 gal/min, beer flows from a ½" OD (3/8" ID) line at a velocity of 19.6 in/sec when the line pressure at the faucet is at atmospheric pressure (14.7 psi). As is standard, the pump 124 forces beer into the downstream portions of the trunk housing 118 at a predetermined pressure set to overcome the maximum head losses encountered by a system having 300 feet of ½" OD (3/8" ID) line and having 4.4 psig head losses in the tower. The typical ½" OD tubing used in this type of system exhibits head losses of about 0.033 psi/ft. Hence, the typical pump has an output pressure of about 30 psi ( $14.7 + 4.4 + 300 \times 0.033$ ). If the distance from the pump to the faucet is only 50 feet, the pump 124 would supply an overpressure of about 10 psi. ( $85.1 - (14.7 + 4.4 + 250 \times 0.033)$ ). Referring to Table 1 and Fig. 7, the desired pressure drop can therefore be obtained by inserting 3.5 segments into the housing 22.

### 3. Structure of Second Preferred Embodiment

In another embodiment, illustrated in Figs. 5 and 6, the pressure reducer 318 is located within the upstream end of the outlet 216. As in the first embodiment, the source comprises a barrel, the outlet 216 comprises a faucet mounted on a tower 226, and the line comprises a trunk housing (not shown) and a short line segment 220. Liquid is pumped through the line 214 by a volumetric pump (not shown) connected to the trunk housing.

The pressure reducer 318 of this embodiment has a housing 322 have multiple passages and a separate restrictor in each passage. The illustrated housing has two parallel passages 324 and 324' separated from one another by a central divider 323. Each passage 324 and 324' contains a restrictor 327, 327' formed from a series of restriction blades 326 connected to one another by posts 330 to form interconnected segments 344 of two blades each in the same manner as in the first embodiment. This embodiment can also feature a recombining device 346 to help straighten flow for smoother dispensation at the liquid outlet 216. The recombining device 346 in this embodiment may be a bowl-shaped depression at the downstream end of the housing 322.

The pressure reducer 318 of this embodiment, while being more complex than the pressure reducer 18 of the first embodiment, is short enough to fit within an existing faucet 216 in an existing opening in the tower 226 while providing the same magnitude of pressure drop as the pressure reducer 18 of the first embodiment. The pressure reducer 318 therefore is usable in applications in which the line 214 is inaccessible.

The increased pressure drop per unit length afforded by the pressure reducer of this embodiment is due not only to the presence of multiple passages 324 and 324' in the housing 322, but also due to the fact the pressure drop per unit length varies inversely with the diameter of a pressure reducer. Hence, each relatively narrow restrictor 327, 327' produces a larger pressure drop than a wider restrictor of the same length. The effect of rod-diameter variation on per-segment restriction is demonstrated graphically by the curve 62 in Fig. 8, which illustrates pressure drop as water flows through a pressure reducer at 1 gal/min. The pressure reducer has about a 3/16" diameter restrictor rod housed in a 0.195" ID housing. The pressure drop provided by a restrictor having a given number of segments is determined by the equation :  $y = 13.03x - 5.99$ , where x is the number of restrictor segments and y is the pressure reduction obtained as water flows through the pressure reducer at 1 gal/min. Specifically, about a 21 total psig pressure drop is obtained with a two-segment restrictor, about a 35 psig total pressure drop is obtained with a 3 segment restrictor, etc. The data from Fig. 8 is tabulated in Table 2:

Table 2

| Number of<br>Blades | Measured<br>Pressure Drop<br>(PSIG) | Assembly<br>Pressure<br>Drop (PSIG) | Mixing Rod<br>Restriction<br>(PSIG) | Mixing Rod<br>Restriction per<br>Segment |
|---------------------|-------------------------------------|-------------------------------------|-------------------------------------|--|
| 1                   | 9.2                                 | 2.2                                 | 7.0                                 | 7.0                                      |
| 2                   | 21.6                                | 2.2                                 | 19.4                                | 9.7                                      |
| 3                   | 34.8                                | 2.2                                 | 32.6                                | 10.9                                     |
| 4                   | 51.5                                | 2.2                                 | 49.3                                | 12.3                                     |
| 5                   | 59.4                                | 2.2                                 | 57.2                                | 11.4                                     |
| AVERAGE:            |                                     |                                     |                                     | 10.3                                     |

Comparing the different slopes of the curves 60 and 62 reveals that the pressure drop offered by a pressure reducer can be precisely fine tuned not only by incorporating blades of different lengths or different pitches in the same pressure reducer, but also by incorporating blades of different diameters in the same pressure reducer.

Many changes and modifications could be made to the invention in addition to those discussed above. For instance, the inventive pressure reducer could be used in a wide variety of applications other than the dispensing of pressurized beverages. Alternative applications include as a flow restrictor in hydraulic system in which the need exists to reduce the pressure from a main pump to multiple lines serviced by the pump. The restrictor could also take many forms other than illustrated interconnected segments of curved blades, so long as the structure imparts the required repeated directional changes to the flowing liquid. Other changes will become apparent from the appended claims.

CLAIMS

I claim:

1. A pressurized liquid dispensing system comprising:  
a pressurized liquid source that is configured to deliver pressurized liquid at a first,  
5 relatively high line pressure;  
a liquid dispenser that is located remote from said liquid source and that is configured  
to dispense liquid delivered thereto at a second, relatively low pressure;  
a liquid line connecting said liquid source to said liquid dispenser; and  
a pressure reducer device within said liquid line, said pressure reducer comprising a  
10 housing and a restrictor disposed within said housing, said housing having a first opening, a  
second opening, and at least one passage formed between said first and second openings, said  
restrictor being located in said passage and being configured to impart a series of directional  
changes to liquid flowing through said passage, thereby reducing the pressure of liquid  
flowing through said passage to at least approximately said second pressure.  
15
2. A system as recited in claim 1, wherein said restrictor comprises a plurality of flow  
divider segments located in series within said passage.
3. A system as recited in claim 2, wherein each of said flow divider segments is  
20 configured to sequentially divide liquid flowing therepast into multiple liquid streams and to  
recombine said multiple liquid streams.
4. A system as recited in claim 3, wherein each of said flow divider segments comprises  
a generally helically curved blade having a leading edge, a trailing edge, and opposed curved  
25 surfaces, each of which is configured to border one of said liquid streams.
5. A system as recited in claim 4, wherein said curved blades are arranged end-to-end  
such that, with the exception of a last curved blade of said pressure reducer, the trailing edge  
of each curved blade extends at least generally perpendicularly to the leading edge of an  
30 adjacent downstream blade.

6. A liquid flow pressure reducer comprising:
- (A) a housing having an inlet opening, an outlet opening, and at least one passage formed between said inlet opening and said outlet opening; and
- (B) a restrictor formed from a plurality of flow divider segments located within
- 5 said passage, each of said flow divider segments being configured to sequentially divide liquid flowing therepast into multiple liquid streams and to recombine said multiple liquid streams while causing the flowing liquid to change directions.
7. A pressure reducer as recited in claim 6, wherein said flow divider segments are
- 10 arranged in a pattern such that said segments alternate between segments having a first directional curvature and segments having a second directional curvature.
8. A pressure reducer as recited in claim 7, wherein each of said segments comprises a
- generally helically curved blade having a leading edge, a trailing edge, and opposed curved
- 15 surfaces, each of which is configured to border one of said liquid streams.
9. A pressure reducer as recited in claim 8, wherein said curved blades are arranged
- end-to-end such that, with the exception of a last curved blade of said pressure reducer, the
- trailing edge of each curved blade extends at least generally perpendicularly to the leading
- 20 edge of an adjacent downstream blade.
10. A pressure reducer as recited in claim 6, further comprising a flow divider bar
- mounted on the leading edge of an upstream-most segment of said restrictor and a flow
- straightener mounted on the trailing edge of a downstream-most segment of said restrictor.
- 25
11. A pressure reducer as recited in claim 6, wherein said housing has a single passage.
12. A pressure reducer as recited in claim 6, wherein said housing has a plurality of
- passages, each of which houses a separate restrictor.
- 30
13. A pressure reducer as recited in claim 12, wherein a chamber is provided within said
- housing toward said outlet opening to allow liquid from each passage to recombine and help
- straighten flow before exiting said outlet opening.

14. A method comprising:  
determining a pressure drop required in a liquid flow path to achieve a desired liquid pressure at an outlet of said flow path;  
determining properties of a pressure reducer required to obtain said pressure drop;  
5 and inserting a pressure reducer having said determined properties in said flow path.
15. A method as recited in claim 14, wherein the inserting step comprises inserting said pressure reducer in a liquid line of said flow path at a location remote from said outlet of said flow path.
- 10 16. A method as recited in claim 14, wherein the inserting step comprises inserting said pressure reducer into a tubing section and then coupling ends of said tubing section to adjacent sections of a liquid line of said flow path.
- 15 17. A method as recited in claim 14, wherein the inserting step comprises inserting said pressure reducer in a faucet having an outlet that forms an outlet path and that couples an inlet of said faucet to a liquid line of said flow path.
- 20 18. A method as recited in claim 14, wherein the step of determining properties comprises consulting tabulated data correlating pressure drop with flow reducer properties.
19. A method of reducing liquid pressure in a pressurized line, the method comprising:  
directing liquid through said pressurized line; and  
as said liquid flows through said pressurized line, deflecting said liquid through a  
25 plurality of repeated directional changes within a generally straight portion of said line.
20. A method as recited in claim 19, wherein the deflecting step comprises alternatively deflecting said liquid in a clockwise and counterclockwise rotation as said liquid flows through said generally straight portion of said pressurized line.
- 30 21. A method as recited in claim 20, further comprising, as said liquid is flowing through said generally straight portion of said pressurized line,  
dividing an undivided liquid stream into a first set of multiple streams and deflecting said first set of liquid streams in a first direction;

allowing said first set of multiple liquid streams to converge to form a combined liquid stream having a lower pressure than said undivided stream; then

dividing said combined liquid stream into a second set of multiple streams and deflecting said second set of liquid streams in a second direction; and

5 allowing said second set of liquid streams to reconverge to form a recombined liquid stream having a lower pressure than said combined liquid stream.

22. A method as recited in claim 21, wherein:

each of the dividing steps comprises directing a liquid stream over an edge of curved  
10 blade positioned within said liquid line,

each of the deflecting steps comprises directing a liquid stream over a toroidal major surface of said curved blade, and

each of the reconverging steps comprises directing divided liquid streams past a trailing edge of a curved blade and into contact with one another.

15


23. A method as recited in claim 22, wherein the dividing and converging steps comprise directing liquid past a first blade curved in a first direction and the redividing and reconverging steps comprise directing the liquid past a second curved blade curved in a second direction, said first and second blades being connected to one another in an end-to-  
20 end fashion, and a trailing edge of said second segment being positioned at an angle that is offset from an angle of a trailing edge of said first segment by 90 °.

24. A method as recited in claim 19, wherein liquid flows through a single passage during the pressure reduction operation.



25

25. A method as recited in claim 19, wherein liquid flows through multiple passages during the pressure reduction operation, said multiple passages having a common inlet and a common outlet, and a separate pressure reduction device being provided in each passage.



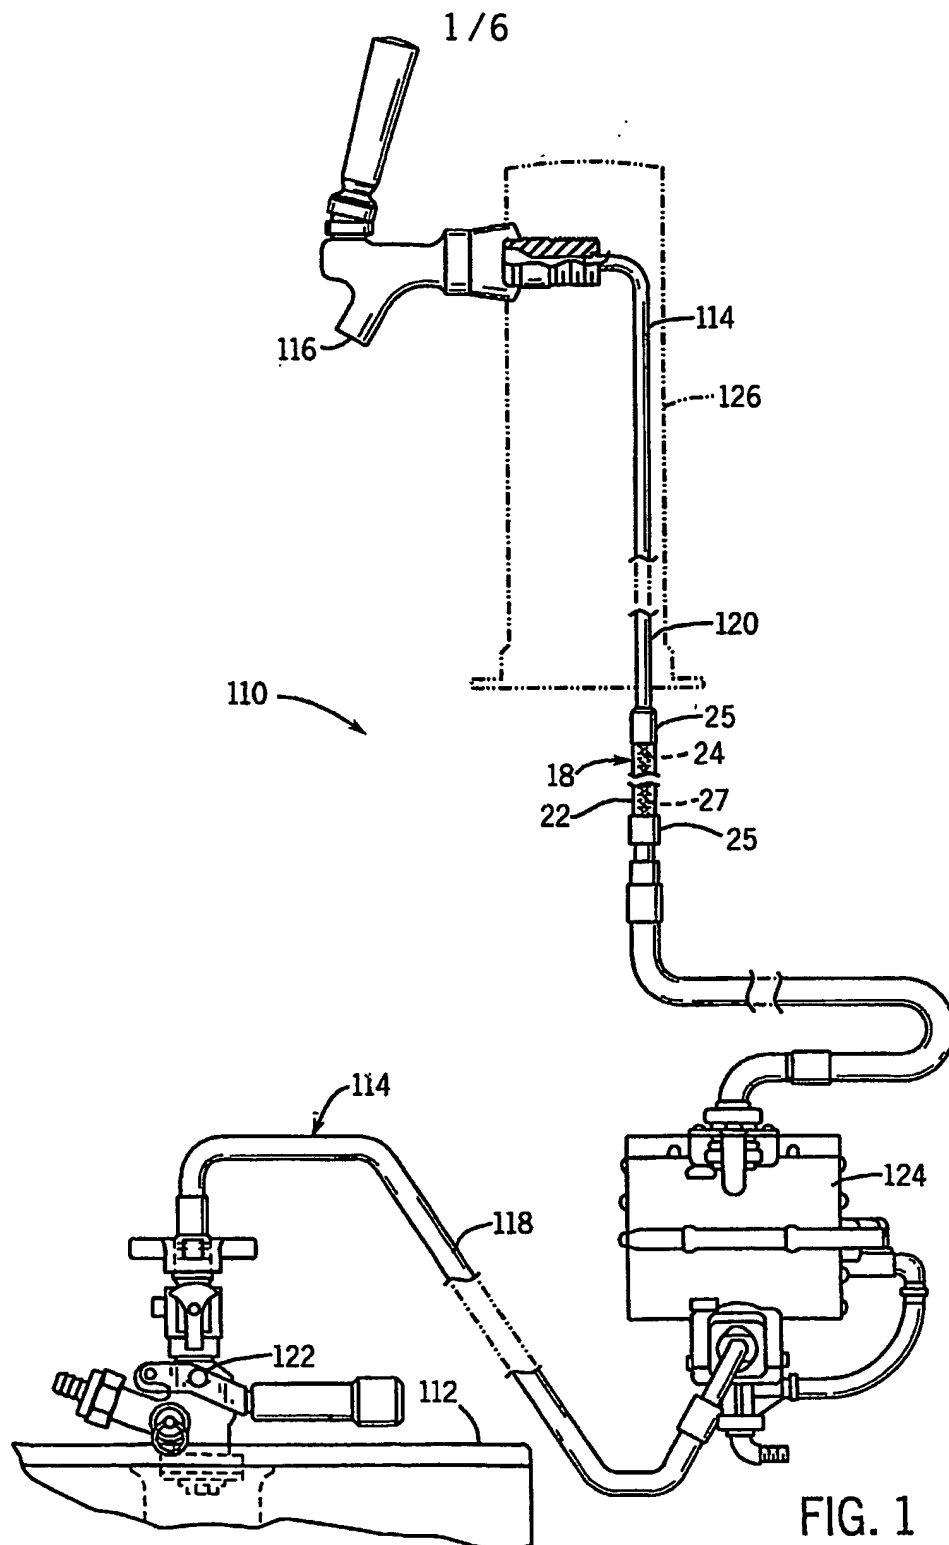

2 / 6

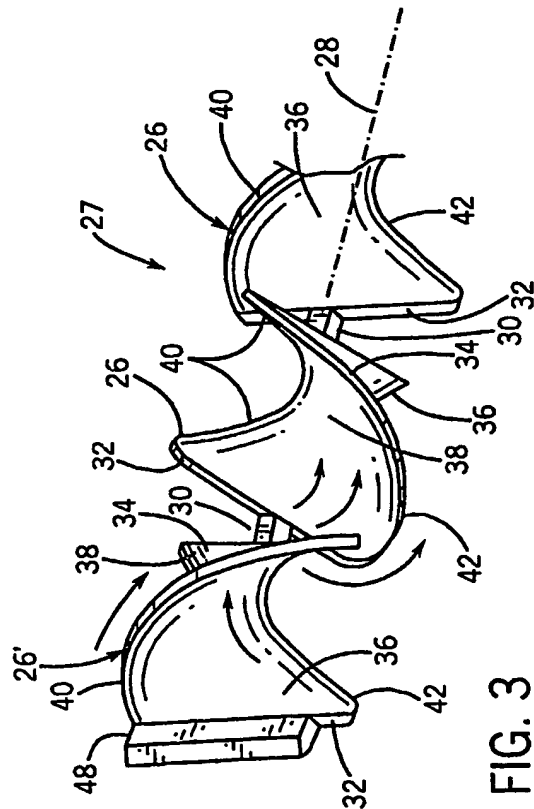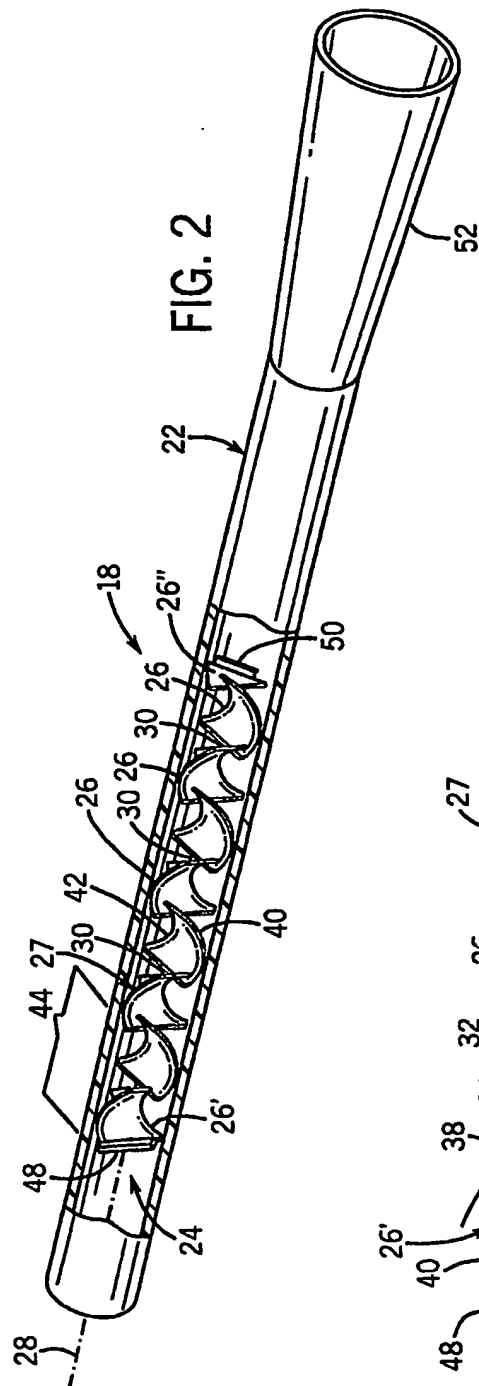

3 / 6


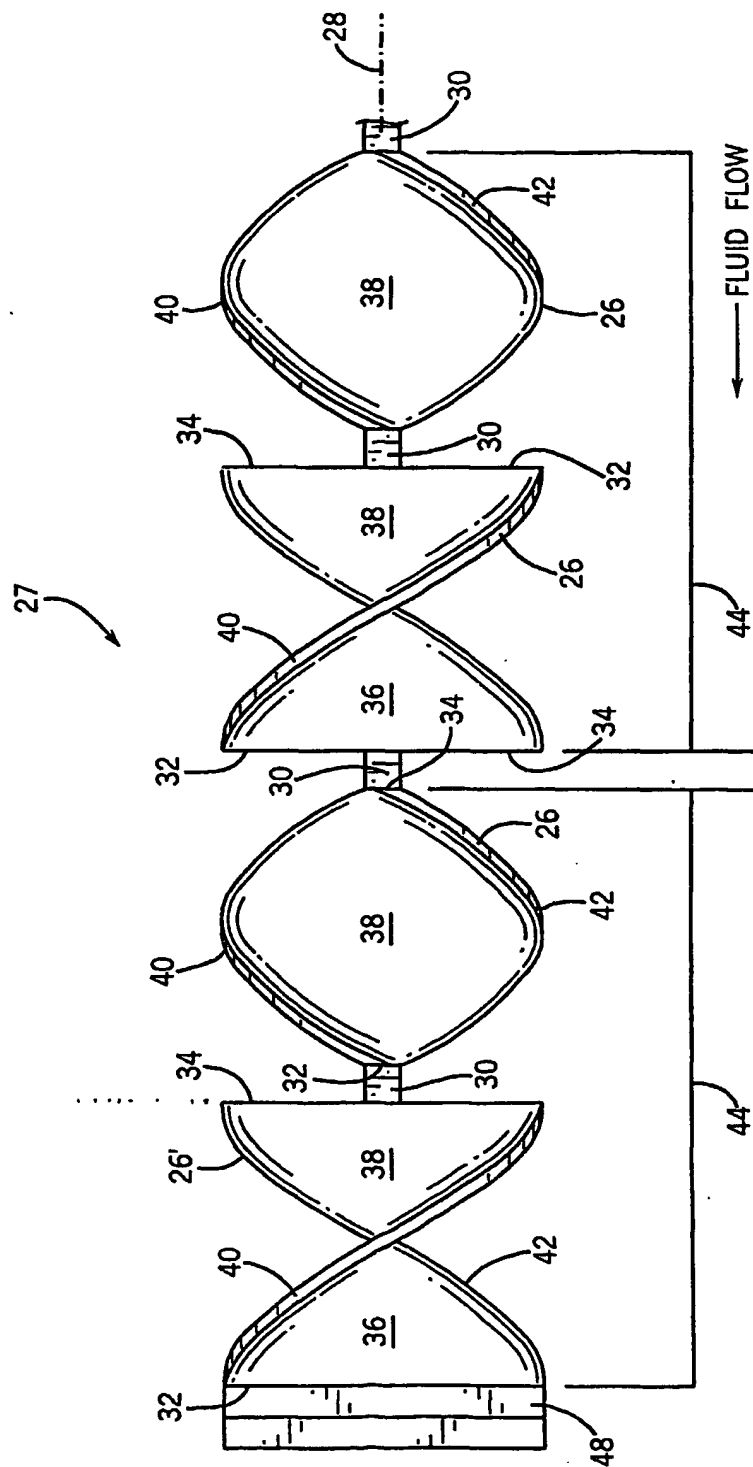


FIG. 4

4 / 6

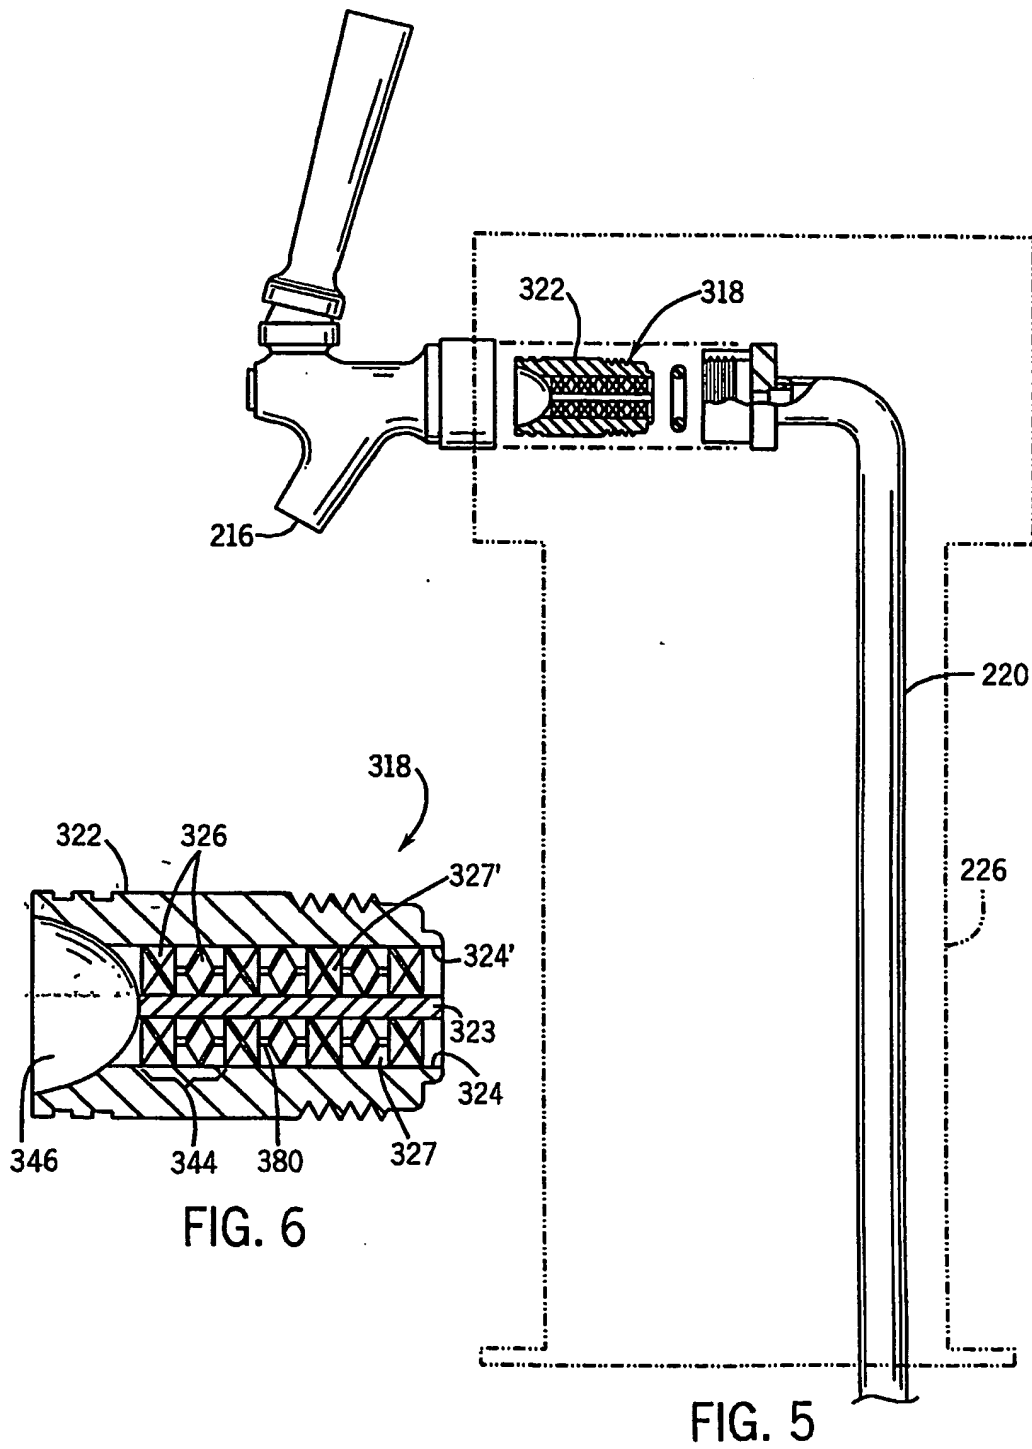

5 / 6

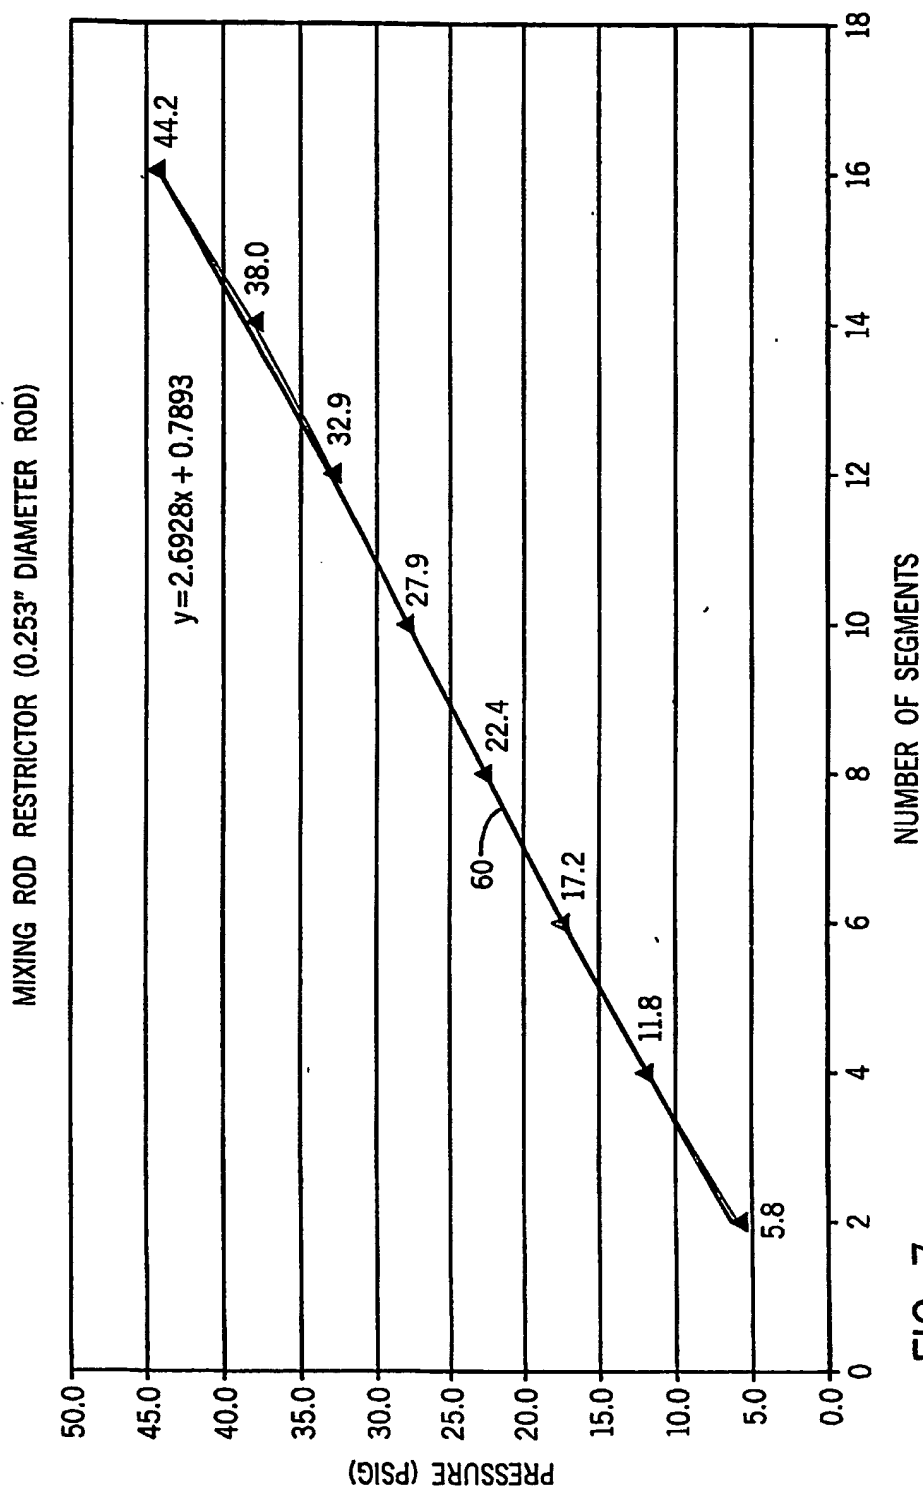


FIG. 7

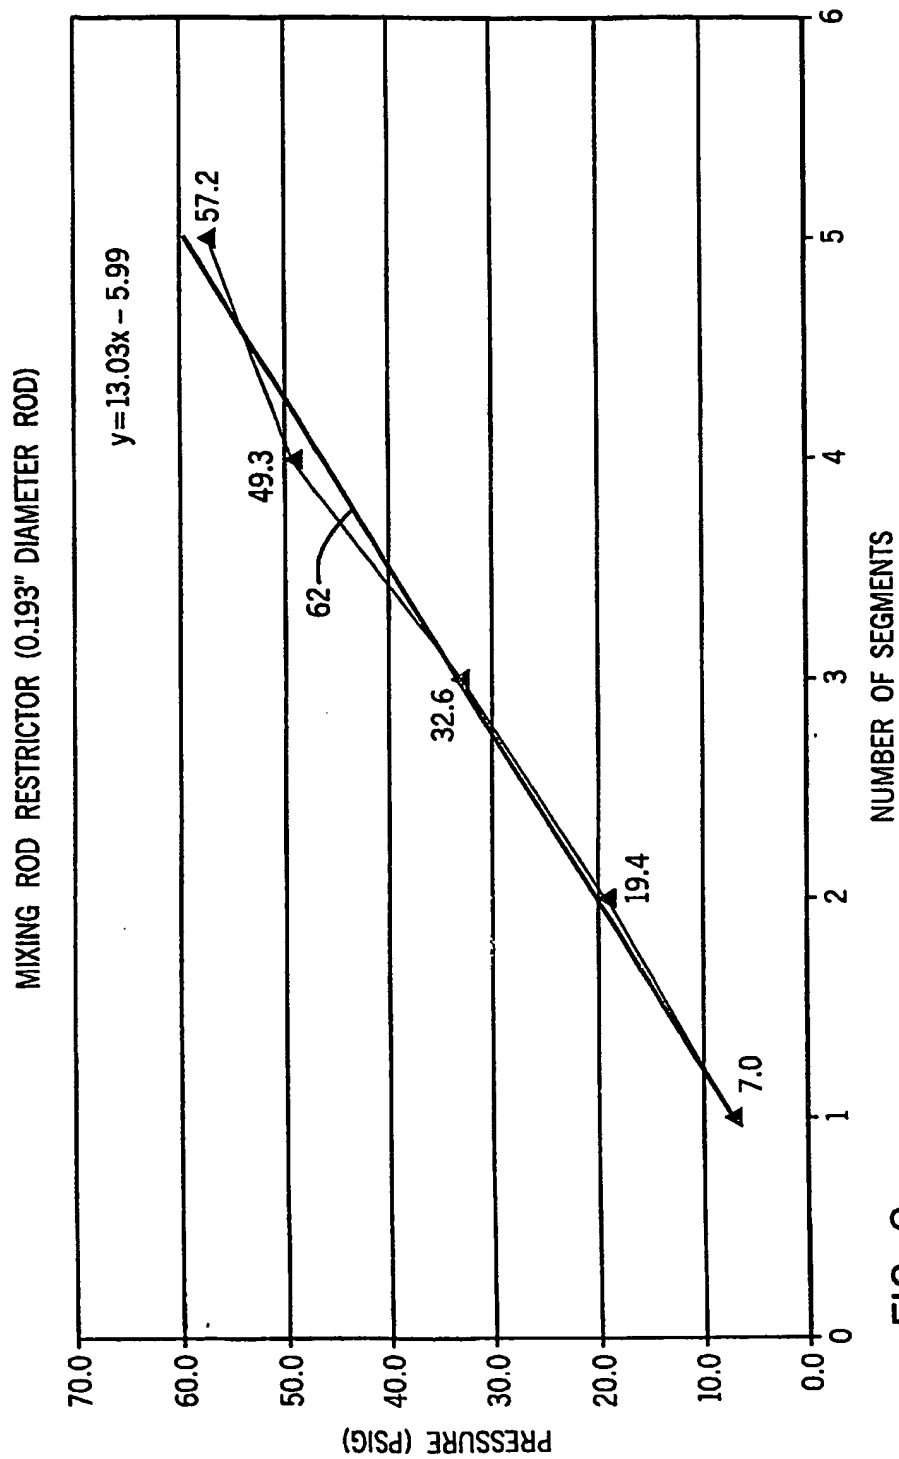


FIG. 8

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 02/35682

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B67D1/14 B67D1/12

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B67D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages                                      | Relevant to claim No. |
|------------|---|-----------------------|
| X          | US 2 132 011 A (RAY BENNETT V ET AL)<br>4 October 1938 (1938-10-04)<br>the whole document<br>---                        | 1-3,6,<br>10,11,19    |
| X          | DE 198 02 291 A (MOGLER GMBH & CO GEB)<br>5 August 1999 (1999-08-05)<br>column 1; line 23 - line 50; figures 1-9<br>--- | 1                     |
| A          | EP 0 285 769 A (COORS CO ADOLPH)<br>12 October 1988 (1988-10-12)<br>---   |                       |
| A          | DE 37 07 128 A (KNOPF KARL HORST)<br>15 September 1988 (1988-09-15)<br>-----  |                       |

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&amp;" document member of the same patent family

Date of the actual completion of the international search

10 April 2003

Date of mailing of the international search report

06. 10. 2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Müller, C

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US 02/35682

## Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
  
2. ☐ Claims Nos.:  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
  
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
  
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
  
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
  
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:  
1-13, 19-25

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.



FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-13, 19-25

Pressurized liquid dispensing system and method

2. Claims: 14-18

Method for determining an appropriate pressure reducer

# INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/US 02/35682

| Patent document<br>cited in search report |   | Publication<br>date | Patent family<br>member(s) | Publication<br>date |
|---|---|---------------------|----------------------------|---------------------|
| US 2132011                                | A | 04-10-1938          | NONE                       |                     |
| DE 19802291                               | A | 05-08-1999          | DE 19802291 A1             | 05-08-1999          |
| EP 0285769                                | A | 12-10-1988          | US 4739901 A               | 26-04-1988          |
|   |   |                     | AU 589057 B2               | 28-09-1989          |
|   |   |                     | AU 1031788 A               | 06-10-1988          |
|   |   |                     | CA 1277643 C               | 11-12-1990          |
|   |   |                     | EP 0285769 A1              | 12-10-1988          |
|   |   |                     | JP 63272695 A              | 10-11-1988          |
|   |   |                     | NZ 223147 A                | 21-12-1989          |
| DE 3707128                                | A | 15-09-1988          | DE 3707128 A1              | 15-09-1988          |